

20
23

INSPIRE
YOUR ENVIRONMENT

PRODUCT CATALOG

TAYLOR

- 04 YOUR VITAL ACCESSORY
- 06 STEPS OF INNOVATION
- 09 PRODUCT WARRANTIES
- 28 ASSOCIATIONS AND GROUPS

PRODUCT COLLECTIONS

SIGNATURE LINE®

- 10 INTRODUCTION
- 12 RESOLUTE®
- 13 PINNACLE®
- 14 DYNAMIC®
- 15 STEADFAST®
- 16 RIDGELINE®
- 17 IRONWOOD®
- 18 ASPEN®
- 19 IRONWOOD GLUE ASSIST®
- 20 AGILE®
- 21 VERSATILE®
- 22 SAHARA®
- 23 ZEPHYR®
- 24 ENHANCE®
- 25 FINALE®
- 26 ELEVATE™
- 27 GRAVITY™

ESSENTIALS LINE

- 30 INTRODUCTION
- 32 ALPINE
- 32 TIMBERLINE™
- 33 2049
- 33 REPAIR
- 34 900
- 34 722
- 35 710
- 35 EDGE-LOCK
- 36 2062
- 36 2025

ADDITIONAL ITEMS

- 38 2037
- 38 2055
- 38 901
- 38 1N/1N-C
- 39 501
- 39 720/720-C
- 39 775/775-C
- 39 2070
- 39 2089
- 39 757
- 39 725
- 39 ODORGHOST™ +UV
- 39 ODORGHOST™

RESOURCES

- 40 INTRODUCTION
- 42 SIGNATURE LINE® AT A GLANCE
- 44 ESSENTIALS LINE AT A GLANCE
- 46 SUSTAINABILITY
- 49 WEBSITE AND APP
- 50 TECHNICAL DEPARTMENT
- 52 SIGNATURE LINE® FLOORING TYPES
- 54 ESSENTIALS LINE FLOORING TYPES
- 57 APPROVED TOOLS OVERVIEW
- 58 SIGNATURE LINE® TOOLS
- 60 ESSENTIALS LINE TOOLS
- 62 PACKAGING AND SHIPPING



For almost 50 years, we have **INSPIRED YOUR ENVIRONMENTS**. Our premium flooring adhesive solutions empower your creativity and energize your sustainable designs. We help bring your visions to life through resilient, carpet, or hardwood surfaces.

Let our reputation of being **WITH YOU EVERY STEP™** fuel your confidence for any project. We trust our products to last a lifetime, and we know you can too.

We invite you to discover all that makes us more than a sundry.
We are **YOUR VITAL ACCESSORY**.



YOUR VITAL ACCESSORY

At **TAYLOR**, we are made different. We believe in our people; our products and our service to create an unrivaled level of partnership. As **YOUR VITAL ACCESSORY**, we enhance your performance, reputation, profitability, momentum and success. Experience our difference and let us **ILLUMINATE YOUR IMAGE**.

- WHY
- › Trusted industry leader for over 45 years
 - › Proven history of innovation (see page 6)
 - › Specialists in adhesives & coatings
 - › Focused on sustainability
 - › Top-rated brand for 16 consecutive years
 - › Your Vital Accessory
 - › The Flooring Division of the Meridian Adhesives Group
 - › Highly collaborative
 - › Partner-centric
 - › Open and transparent communication
 - › Dedicated to industry training & education

- HOW
- MANUFACTURING & DISTRIBUTION

 - › 3 TAYLOR manufacturing facilities (CA, GA, TX)
 - Warehousing & shipping - FOB
 - Strategic location access (rail, interstate)
 - › Distribution options (shipping, pricing, inventory)
 - FOB - 3 Canadian warehouses
 - FOB - 10 Meridian warehouses
 - FOB - TAYLOR wholesale distributors
 - Hybrid programs available
- ACCOUNT MANAGEMENT

 - › World-class service and quality
 - › Outstanding management and support
 - › Collaboration on promotional opportunities
 - › Partnership approach
 - › Responsive customer support
- TECHNICAL DEPARTMENT

 - › Product testing (flooring, adhesives, coatings)
 - › Troubleshooting (on-site, in-person, remote)
 - › Product training (on-site, in-person, remote)
 - › Technical assistance (on-site, in-person, remote)
 - › Bi-lingual support (English/Spanish)
 - › 1-Hour Response Guarantee
- R&D DEPARTMENT

 - › Discovery and consulting
 - › Ongoing product innovations
 - › Product development
 - › Quality control management
 - › Certifications and sustainability
- MARKETING DEPARTMENT

 - › Strategy consulting
 - Go-to-market planning
 - Brand updates and transitions
 - › Packaging/labeling
 - Consulting
 - Colors, fonts, images, icons, etc.
 - Layout, design, execution
 - Translation services*
 - Review services
 - Finished product renders (3-D)
 - › Collateral services
 - Design, consulting, production, review
 - Product Highlight Sheets (PHS)
 - Technical Data Sheets (TDS)
 - Safety Data Sheets (SDS)
 - Warranty documents
 - Flyer's/promotional materials
 - › Video services*
 - Consulting, directing and producing
 - › Mobile app consulting*
 - › TAYLOR TIME: education and training platform
 - PARTNER EXCLUSIVE: custom training events
 - LIVE: industry educational webinars
 - TIPS: short instructional videos
 - NEWS: monthly newsletter

*Additional fees may apply



ILLUMINATE YOUR IMAGE



#yourvitalaccessory



STEPS OF INNOVATION



CRI
GREEN LABEL
+PLUS
Indoor Air Quality
Adhesive Testing Program
carpet-rug.org



UL
GREENGUARD
PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/CC
UL 2818



floor
score

CERTIFIED BY
SCS Global Services

+



USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 0951

■



+



Meridian
Adhesives Group



TAYLOR™ TIME

INTERNATIONAL
CFI
CERTIFIED FLOORING INSTALLERS



+

+



mindful
MATERIALS



+





IGNITE YOUR PERFORMANCE






#yourvitalaccessory



INDUSTRY LEADING WARRANTIES

One of the ways we **IGNITE YOUR PERFORMANCE** is how we stand behind our products. Our industry-leading warranties can protect you against bond failures, de-lamination due to elevated moisture, or even topical liquids.

WHAT OUR PERFORMANCE WARRANTIES COVER

-  Replacement floor covering material
-  Replacement TAYLOR product(s)
-  Labor costs to repair/replace

HOW LONG OUR PERFORMANCE WARRANTIES LAST



When you buy a TAYLOR product through any of our distribution partners, we stand behind it's performance with a 10-Year Warranty.



When a TAYLOR product is installed by an approved certified installer, we stand behind it's performance with a Lifetime Warranty*.

*Lifetime Warranty matches the warranty term of the floor covering material installed. For a list of approved certified installers, visit our website tayloradhesives.com/warranties.

NOTE: Performance warranties cover Signature Line® and Essentials Line products only (excluding TAYLOR 900). Coverage varies based on product, see each product's warranty document for complete details.






The most advanced line of flooring adhesives and coatings available in the industry.

Ranging from residential to heavy commercial applications, these high-performance, user-friendly, one-part products are designed to save time and money, all while being low VOC and low odor.

This premium collection is formulated with no solvents or isocyanates, making them safer and easier to use. Our dedication to Indoor Air Quality and a healthier environment for both installers and occupants is reflected in everything we do.

Find each products sustainability information on page 46.

PRODUCT CATEGORY KEY

 RESILIENT	 MOISTURE
 WOOD	 SPECIALTY
 CARPET	

INTERESTED IN LEARNING MORE?



SCAN QR CODE FOR MORE DETAILS

#yourvitalaccessory



INDOOR/OUTDOOR

APPLICATION

RESOLUTE®

UNLIMITED MOISTURE VAPOR BARRIER, HARDSET ELASTOMERIC ADHESIVE



COVERAGE: 50-250 ft²/gal
AVAILABLE IN: 2 and 4 gal
SHELF LIFE: 1 year

- Unlimited moisture protection (see TDS) • Cost savings potential • No moisture or pH testing required • No sub-slab moisture barrier required (see TDS) • Topical liquid resistance (water, spills, etc.) • Permanent, waterproof bond • 1-step installation (no stirring/mixing) • Self-healing, elastomeric membrane • Excellent plasticizer migration resistance • Faster construction timeline • 6-hour cure (heat weld, wet mop, strip/finish) • Rapid occupancy times • Extreme heavy rolling loads • Installs multiple flooring types • Sound control (IIC, STC) • Low VOC, extremely low odor • Antimicrobial technology

*NTR = No Testing Required

**Sound ratings based on 6" concrete slab overlaid with 3.2 mm LVP flooring
NOTE: Exterior applications warranted only with approved exterior rated flooring products.



RH
NTR* 100%



PH
NTR* 5-14



MVER
NTR*



OPEN TIME
0 MIN



WORKING TIME
45 MIN



CURE TIME
6 HRS



LIGHT TRAFFIC
3 HRS



HEAVY TRAFFIC
4 HRS



ROLLING LOADS
8 HRS



ΔIIC
18 dB**



IIC
68 dB**



STC
66 dB**



EXTREMELY
LOW ODOR

PINNACLE®



HARD-SET, TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

- Aggressive tack, fast grab • High moisture tolerance • Permanent, waterproof bond • High-strength, elastomeric bond • Ideal for heavy rolling loads • Immediate access for light traffic • Installs multiple flooring types • ColorReady® technology • Excellent plasticizer migration resistance • Low VOC, extremely low odor • Antimicrobial technology



RH
99%



PH
5-12



MVER
12 LBS



FLASH TIME
30-60 MIN*



WORKING TIME
3 HRS*



CURE TIME
12 HRS



LIGHT TRAFFIC
0 MIN*



HEAVY TRAFFIC
24 HRS



ROLLING LOADS
48 HRS



EXTREMELY
LOW ODOR

COVERAGE: 150-350 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years






COVERAGE: 90-350 ft²/gal | AVAILABLE IN: 1 and 4 gal | SHELF LIFE: 2 years



DYNAMIC[®]

FIRM-SET, MODIFIED TRANSITIONAL
PRESSURE SENSITIVE[®] ADHESIVE




- Aggressive tack, fast grab
- High moisture tolerance
- High-strength, water-resistant bond
- Repositionable installation
- Immediate access for light traffic
- Handles heavy rolling loads
- Attractive price point
- Installs multiple flooring types
- 12 hours of working time
- ColorReady[®] technology
- Simple installation
- Elastomeric bond
- Plasticizer migration resistance
- Low VOC, extremely low odor
- Antimicrobial technology



STEADFAST[®]

CLEAR THIN SPREAD, VCT ADHESIVE

- High strength, water-resistant bond
- Immediate access for light traffic
- Competitive price point
- 24 hours of working time
- Warranted over cutback residue (see TDS)
- Simple installation
- Elastomeric bond
- Handles heavy rolling loads
- Designed specifically for VCT flooring
- Low VOC, extremely low odor
- Antimicrobial technology



RIDGELINE®

UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- Unlimited moisture protection (porous slab) • Cost savings potential • No moisture or pH testing required • Permanent, waterproof bond • Solvent and isocyanate-free
- Non-staining and easy to clean • 1-step installation (no stirring/mixing) • High-strength, elastomeric membrane • Rapid occupancy times • Faster construction timeline • Sound control (IIC, STC) • Warranted over cutback residue (see TDS)
- Protects flooring from alkali attack • Extremely low VOC, extremely low odor • Antimicrobial technology

RH
NTR* 100%

PH
NTR* 5-14

MVER
NTR*

OPEN TIME
0 MIN

WORKING TIME
45 MIN

CURE TIME
12 HRS

LIGHT TRAFFIC
6 HRS

HEAVY TRAFFIC
6 HRS

IIC
68 dB**

STC
62 dB**

EXTREMELY
LOW ODOR

COVERAGE: 20-70 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year

*NTR = No Testing Required
**Sound ratings based on 6" concrete slab
with a suspended wallboard ceiling overlaid
with 3/8" engineered hardwood flooring



RH 95% PH NTR* 5-14 MVER 15 LBS OPEN TIME 0 MIN WORKING TIME 45 MIN CURE TIME 12 HRS
LIGHT TRAFFIC 6 HRS HEAVY TRAFFIC 6 HRS IIC 66 dB** STC 61 dB** EXTREMELY LOW ODOR



COVERAGE: 20-70 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year

IRONWOOD®

95% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- 95% moisture protection (porous slab) • Permanent, waterproof bond • Solvent and isocyanate-free
- Non-staining and easy to clean • 1-step installation (no stirring/mixing)
- High-strength, elastomeric membrane • Rapid occupancy times • Sound control (IIC, STC) • Warranted over cutback residue (see TDS) • Protects flooring from alkali attack
- Extremely low VOC, extremely low odor • Antimicrobial technology

*NTR = No Testing Required
**Sound ratings based on 6" concrete slab with a suspended wallboard ceiling overlaid with 3/8" engineered hardwood flooring



90% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- 90% moisture protection (porous slab) • Attractive price point • Permanent, waterproof bond • Solvent and isocyanate-free • Non-staining and easy to clean • 1-part installation (no stirring/mixing) • Rapid occupancy times • High-strength, elastomeric membrane • Warranted over cutback residue (see TDS) • Protects flooring from alkali attack • Extremely low VOC, extremely low odor • Antimicrobial technology



ASPEN®

COVERAGE: 20-70 ft²/gal | AVAILABLE IN: 4 gal | SHELF LIFE: 1 year

RH 90%

PH NTR* 5-14

MVER 10 LBS

OPEN TIME 0 MIN

WORKING TIME 45-60 MIN

CURE TIME 12 HRS

LIGHT TRAFFIC 6 HRS

HEAVY TRAFFIC 6 HRS

EXTREMELY LOW ODOR

*NTR = No Testing Required

IRONWOOD GLUE ASSIST

OPEN TIME 0 MIN

WORKING TIME 45 MIN

CURE TIME 12 HRS

LIGHT TRAFFIC 6 HRS

HEAVY TRAFFIC 6 HRS

EXTREMELY LOW ODOR

COVERAGE: Dependant upon user
AVAILABLE IN: 20 and 28 ounces
SHELF LIFE: 1 year

WOOD FLOORING, GLUE ASSIST ADHESIVE

- Reduces friction squeaks common with nail/staple-down installations • Wet-set, early grab, fast-curing formula • Solvent and isocyanate-free • Non-staining and easy to clean • Rapid occupancy times • High-strength, waterproof, elastomeric bond • Warranted over cutback residue (see TDS) • Extremely low VOC, extremely low odor • LEED v4 contributing (CDPH v1.2) • Antimicrobial technology



AGILE®

COVERAGE: 50-180 ft²/gal (5-20 yd²/gal) | AVAILABLE IN: 4 gal | SHELF LIFE: 2 years



RH
90%



PH
5-9



MVER
8 LBS



OPEN TIME
15-60 MIN*



WORKING TIME
15-120 MIN*



CURE TIME
12 HRS



LIGHT TRAFFIC
12 HRS*



HEAVY TRAFFIC
24 HRS*



EXTREMELY
LOW ODOR

HARD-SET, MULTI-PURPOSE ADHESIVE

- Early leg development • Aggressive tack, fast-grab formula • High-strength, elastomeric bond • Up to 2 hours working time • Rapid occupancy • Permanent, water-resistant bond • Attractive price point • Installs multiple flooring types • Simple installation • Solvent and isocyanate-free • Low VOC, extremely low odor • Antimicrobial technology



*Data reference direct glue-down usage only




SOFT-SET, FULLY REPOSITIONABLE PRESSURE SENSITIVE ADHESIVE


COVERAGE: 150-350 ft²/gal
(16-40 yd²/gal)
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years

- Repositionable for entire life cycle • Aggressive tack, fast grab • High moisture tolerance • Elastomeric, water-resistant bond • Immediate access for light traffic • 24 hours of working time • Attractive price point • Installs multiple flooring types • ColorReady® technology • Simple installation • Plasticizer migration resistance • Solvent and isocyanate-free • Non-staining and easy-to-clean • Low VOC, extremely low odor • Antimicrobial technology







RH
95%




PH
5-10




MVER
10 LBS




FLASH TIME
30-60 MIN




WORKING TIME
24 HRS




CURE TIME
24 HRS



LIGHT TRAFFIC
0 MIN



HEAVY TRAFFIC
24 HRS



EXTREMELY
LOW ODOR

VERSATILE®




SAHARA[®]




UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC MEMBRANE

COVERAGE: 90-120 ft²/gal | AVAILABLE IN: 2 gal | SHELF LIFE: 1 year


- Protects floating and loose-lay flooring
- Unlimited moisture protection (porous slab)
- Replaces 2-part epoxies
- Cost savings potential
- No testing required (RH, pH, MVER)
- No shot/bead-blasting required (CSP 1+)
- Protects flooring from alkali attack
- Permanent, waterproof membrane
- Simple, 1-part installation
- Inhibits mold/mildew growth
- Faster construction timeline
- Self-healing, elastomeric membrane
- Handles extreme heavy rolling loads
- Solvent and isocyanate-free
- 1-step installation (no stirring/mixing)
- Extremely low VOC, extremely low odor
- Antimicrobial technology




RH
NTR* 100%




PH
NTR* 5-14



MVER
NTR*



CURE TIME
8 HRS



EXTREMELY
LOW ODOR



*NTR = No Testing Required

95% MOISTURE VAPOR BARRIER, OR ENCAPSULATOR, OR PRIMER COATING

- Protects floating and loose-lay flooring
- 93-95% moisture protection
- Inhibits mold/mildew growth
- Encapsulates cutback residue
- Fast-drying formula
- Detackifies existing adhesive residue
- Primes porous substrates
- Protects flooring from alkali attack
- Attractive price point
- 1-step installation (no stirring/mixing)
- Fast roller application
- Solvent and isocyanate-free
- Zero VOC, extremely low odor
- Antimicrobial technology

COVERAGE: 350 ft²/gal (1 coat), 200 ft²/gal (2 coats)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



*NTR = No Testing Required | **Based on 1- or 2-coat application - see technical data sheet for complete details.
NOTE: Moisture control only available over clean porous concrete per ASTM F710.

ZEPHYR[®]



RH
93-95%**



PH
NTR* 5-14



MVER
10-15 LBS**



CURE TIME
1-2 HRS



EXTREMELY
LOW ODOR



ENHANCE[®]

SURFACE BOND PROMOTER AND ENCAPSULATOR

- Highly-bond-able, textured membrane
- Primes difficult-to-bond substrates
- Protects flooring from alkali attack
- Encapsulates cutback residue
- Detackifies existing adhesive residue
- Seals porous substrates
- Simple, 1-part installation (roller applied)
- Rapid 1-2 hour cure time
- Primes Sahara for glue-down applications
- Extremely low VOC, extremely low odor
- Solvent and isocyanate-free
- Antimicrobial technology

RH
90%

PH
NTR* 5-14

MVR
8 LBS

CURE TIME
1-2 HRS

EXTREMELY
LOW ODOR

COVERAGE: Up to 250 ft²/gal
 AVAILABLE IN: 2 gal
 SHELF LIFE: 1 year



FINALE[®]



HARD-SET, ELASTOMERIC COVE BASE ADHESIVE

- Cures off-white • Non-staining and easy-to-clean • Strong plasticizer migration resistance
- High-strength, water-resistant bond • Permanent, elastomeric bond • Attractive price point
- Aggressive tack, fast-grab formula • 30 minute working time • Simple installation
- Low VOC, extremely low odor • Solvent and isocyanate-free • Antimicrobial technology

COVERAGE:
 2" base - up to 560 lf/gal | 4" base - up to 280 lf/gal | 6" base - up to 187 lf/gal
 AVAILABLE IN: 10 oz, 30 oz, 1 gal and 4 gal
 SHELF LIFE: 2 years

OPEN TIME
0 MIN

WORKING TIME
30 MIN

CURE TIME
12 HRS

EXTREMELY
LOW ODOR

ELEVATE[®]

ROLLER APPLIED WALL ADHESIVE FOR VINYL PLANK/TILE

- Fast and easy roller application • Aggressive tack, fast grab formula • Holds planks without slipping/sliding
- Non-staining and easy-to-clean • Low VOC, extremely low odor

 **FLASH TIME**
30-60 MIN

 **WORKING TIME**
2 HRS

 **CURE TIME**
12 HRS


 **EXTREMELY**
LOW ODOR


COVERAGE: 250-300 ft²/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 2 years




NOTE: Only use with 2 mm or thinner products. Do not use on walls exposed to direct sunlight or moisture.



 **RH**
85-90%*

 **PH**
5-12

 **MVER**
5-10 LBS*

 **CURE TIME**
1-2 HRS*

 **EXTREMELY**
LOW ODOR



GRAVITY[®] ANTI-SKID SUBSTRATE COATING FOR FLOATING FLOOR INSTALLATION

COVERAGE: 350 ft²/gal (1 coat), 200 ft²/gal (2 coats) | **AVAILABLE IN:** 4 gal | **SHELF LIFE:** 2 years

- Prevents lateral movement of flooring • Up to 90% moisture protection
- Simple roller application • Fast-drying formula • Releasable with no transfer

*Based on 1 or 2-coat application - see technical data sheet for complete details.

We actively support many well-respected industry associations and groups. Our goal is to help further growth and service throughout our industry. Thank you for supporting us in return.



IMAGINE OUR PARTNERSHIP



#yourvitalaccessory





ESSENTIALS LINE

Our Essentials Line offers unique flooring installation solutions while upholding our exacting quality and proven performance standards.

Find each products sustainability information on page 47.

PRODUCT CATEGORY KEY

 RESILIENT	 MOISTURE
 WOOD	 SPECIALTY
 CARPET	

INTERESTED IN
LEARNING MORE?



SCAN QR CODE
FOR MORE DETAILS





Alpine™


UNLIMITED MOISTURE VAPOR BARRIER, URETHANE ADHESIVE


- Unlimited moisture protection (porous slab) • Cost savings potential
- No moisture or pH testing required • Protects flooring from alkali attack
 - Aggressive tack, fast-grab • High-strength, elastomeric bond
- Permanent, waterproof bond • Faster construction timeline • Sound control (IIC, STC) • Non-slump formula • Easy application • 1-step installation (no stirring/mixing) • Low VOC, low odor


COVERAGE: 20-50 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year


**RH**
NTR'
100%


**PH**
NTR*5-14


**MVER**
NTR'


**EXTREMELY**
LOW ODOR


**OPEN TIME**
10 MIN


**WORKING TIME**
45-60 MIN


**CURE TIME**
24 HRS


**LIGHT TRAFFIC**
24 HRS

**HEAVY TRAFFIC**
24 HRS

**ΔIIC**
21 dB**

**IIC**
63 dB**

**STC**
62 dB**



*No Testing Required
**Sound ratings based on 6" concrete slab with ceiling





2049


FLOATING FLOOR TONGUE AND GROOVE ADHESIVE


- ANSI Type II water-resistance • Permanent, water-resistant bond
- Non-staining, easy-to-clean • Solvent and isocyanate-free • Zero VOC, extremely low odor • Attractive price point • Easy application • Antimicrobial technology

COVERAGE: 400 lf/16oz
AVAILABLE IN: 16 ounces
SHELF LIFE: 2 years


**OPEN TIME**
0 MIN

**WORKING TIME**
5-10 MIN


**CURE TIME**
12 HRS


**LIGHT TRAFFIC**
24 HRS

**HEAVY TRAFFIC**
24 HRS

**EXTREMELY**
LOW ODOR








Timberline™


MOISTURE-CURED URETHANE ADHESIVE

- Aggressive tack, fast-grab • High-strength, elastomeric bond
- Permanent, waterproof bond • Non-slump formula • Easy application
- No stirring/mixing required • Low VOC, low odor

COVERAGE: 50-180 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year

**RH**
75%*


**PH**
5-9


**MVER**
5 LBS*

**EXTREMELY**
LOW ODOR

**OPEN TIME**
10 MIN

**WORKING TIME**
45-60 MIN

**CURE TIME**
24 HRS

**LIGHT TRAFFIC**
4 HRS

**HEAVY TRAFFIC**
12 HRS



*Does not offer moisture protection



Repair™

ENGINEERED WOOD FLOOR REPAIR ADHESIVE

- Repair Hollow Spots

COVERAGE: Dependant on user
AVAILABLE IN: 1 quart
SHELF LIFE: 1 year

- Kit Contents:**
- (1) - Bottle of REPAIR (1 quart)
 - (1) - 60cc Plastic Syringe
 - (2) - Metal Applicator Tips
 - (2) - Drill Bits
 - (8) - Dowels
 - (1) - Dowel Punch

**CURE TIME**
24 HRS

**LIGHT TRAFFIC**
24 HRS

**HEAVY TRAFFIC**
24 HRS





900

GENERAL PURPOSE LATEX ADHESIVE

- Permanent, water-resistant bond
- Up to 120-minute working time
- Attractive price point
- Installs multiple flooring types
- Easy application
- Low VOC, extremely low odor
- Solvent-free
- Antimicrobial technology

COVERAGE: 90-180 ft²/gal (10-20 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years

RH **75%**

PH **5-9**

MVER **5 LBS**

EXTREMELY **LOW ODOR**

OPEN TIME **20-30 MIN**

WORKING TIME **15-120 MIN**

CURE TIME **24 HRS**

LIGHT TRAFFIC **12 HRS**

HEAVY TRAFFIC **24 HRS**



710

MULTI-PURPOSE LATEX ADHESIVE

- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Attractive price point
- Extremely low odor
- Solvent free
- Antimicrobial technology

COVERAGE: ~1200 lf/gal
AVAILABLE IN: 1 qt and 1 gal
SHELF LIFE: 6 months

WORKING TIME **15-30 MIN**

CURE TIME **24 HRS**

EXTREMELY **LOW ODOR**

LIGHT TRAFFIC **24 HRS**

HEAVY TRAFFIC **24 HRS**



722

WATER-BASED PAD ADHESIVE

- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Attractive price point
- Low VOC, extremely low odor
- Solvent-free
- Antimicrobial technology

COVERAGE: ~1000 lf/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 2 years

RH **75%**

PH **5-9**

MVER **3 LBS**

EXTREMELY **LOW ODOR**

OPEN TIME **0 MIN**

WORKING TIME **45-60 MIN**

CURE TIME **12 HRS**



Edge-Lock

CARPET EDGE SEALING ADHESIVE

- Blacklight tracers
- Water-resistant bond
- Easy application
- Non-staining, easy-to-clean
- Low VOC, extremely low odor
- Attractive price point
- Solvent-free
- Antimicrobial technology

COVERAGE: ~75 lf/8oz
AVAILABLE IN: 8 ounces
SHELF LIFE: 6 months


WORKING TIME **5-10 MIN**

CURE TIME **12 HRS**

EXTREMELY **LOW ODOR**

LIGHT TRAFFIC **24 HRS**

HEAVY TRAFFIC **24 HRS**

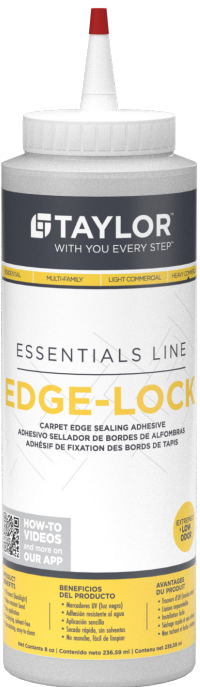



2062

SOLVENT-FREE, FIBERGLASS SHEET SEAM SEALER

- Water-resistant bond • Plasticizer migration resistance • Easy application
- Non-staining, easy-to-clean • Attractive price point
- Antimicrobial technology • Low VOC, extremely low odor • Solvent-free

COVERAGE: 225 lf/8oz
AVAILABLE IN: 8 ounces
SHELF LIFE: 2 years

WORKING TIME 5-10 MIN CURE TIME 24 HRS EXTREMELY LOW ODOR

LIGHT TRAFFIC 6 HRS HEAVY TRAFFIC 6 HRS



2025

UNIVERSAL LATEX PRIMER COATING

- Primes porous substrates • pH blocker, protects flooring • No stirring/mixing required • Fast, 1-coat, roller application • Fast-drying formula
- Solvent and isocyanate-free • Zero VOC, extremely low odor
- Attractive price point • Antimicrobial technology

COVERAGE: 300-450 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years

RH 75% PH NTR*5-14 MVER 5 LBS

CURE TIME 30-60 MIN EXTREMELY LOW ODOR

*No Testing Required



INDULGE IN OUR SERVICE

#yourvitalaccessory



ADDITIONAL ITEMS

PRODUCT CATEGORY KEY



RESILIENT



CARPET



SPECIALTY



2037

FIBERGLASS BACKED SHEET VINYL PRESSURE SENSITIVE ADHESIVE

2037 is a clear set, solvent-free, pressure sensitive adhesive for the installation of fiberglass-backed sheet goods over approve substrates. Fast drying for quick installation, flooring can be installed up to 24 hours after application.

Coverage: Up to 350 ft²/gal | Shelf Life: 2 years




501

SOLVENT-FREE EPOXY FLOORING ADHESIVE

501 is a fast-setting, two-part, low VOC epoxy system used to install vinyl and rubber flooring including hard-to-stick recycled products.

Coverage: 220-260 ft²/gal | Shelf Life: 1 year

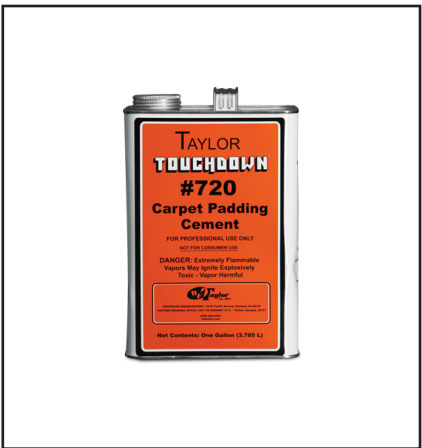

720/720-C

PAD CEMENT

720/720-C Anchors carpet padding to any surface, effectively preventing slippage during power stretching. Dries fast – no tools or preparation needed.
EXTREMELY FLAMMABLE. FOR PROFESSIONAL USE ONLY.
(Product 720-C available to meet California SCAQMD)

Coverage: 500 ft²/gal | Shelf Life: 1 year



775/775-C

CARPET SEAM CEMENT-NATURAL

775/775-C Permanently seams selvage edges and cross joints on carpet. Not recommended for vinyl-backed carpets.
(Product 775-C available to meet California SCAQMD)

Coverage: 1500 lf/gal | Shelf Life: 1 year



2055

PERFORMANCE PLUS FAST-TACK CARPET ADHESIVE

2055 provides quick grab with fast suction and holding power for the interior installation of all non-vinyl backed carpet in direct glue-down and double-stick installations.

Coverage: 50-180 ft²/gal (5-20 yd²/gal) | Shelf Life: 2 years



2070

POWER-TAC™ CONTRACT GRADE ADHESIVE

2070 is a high performance, latex-based adhesive formulated to have aggressive tack for the interior installation of most types of carpet and resilient sheet goods. Not for use with vinyl backings.

Coverage: 50-200 ft²/gal (5-20 yd²/gal) | Shelf Life: 2 years



2089

TUFF-LOK X-LINK™ OUTDOOR CARPET ADHESIVE

2089 is a non-flammable, high solids, advanced cross-linking resin blend adhesive. Recommended for the interior and exterior installation of exterior grade (Action-Bac) unitary backed carpet, and rubber-backed carpet over approved substrates.

Coverage: 50-120 ft²/gal (5-20 yd²/gal) | Shelf Life: 2 years



757

ALL WEATHER EXTERIOR CARPET ADHESIVE

757 is an all weather adhesive specifically made for the permanent exterior installation of outdoor carpets, excluding vinyl-backed and urethane unitaries. (Product 757-C available to meet California SCAQMD)

Coverage: 50-120 ft²/gal (5-20 yd²/gal) | Shelf Life: 1 year



901

ODYSSEY TYPE 1 PREMIUM CERAMIC TILE ADHESIVE

901 is for the interior installation of ceramic wall and floor tile on vertical or horizontal surfaces. Virtually no tile slippage, easy spreading and a strong bond. Complies with ANSI T36.1, Type 1.

Coverage: 35-50 ft²/gal | Shelf Life: 1 year



1N/1N-C

CONTACT CEMENT – BRUSH GRADE

1N/1N-C is formulated to bond large, smooth surfaces such as formica to wood or particle board. Metal, plastic, rubber and wood veneer skins can be laminated to other surfaces. Use when a permanent bond is desired. (Product 1N-C available to meet California SCAQMD)

Coverage: 200 ft²/gal | Shelf Life: 1 year



725

ALL PURPOSE SPRAY ADHESIVE

725 is a non-wrinkling, pressure sensitive, all purpose spray that bonds to most materials including carpet, tile, fabrics, wood, hobby crafts, leather, etc.

Shelf Life: 1 year



ODORGHOST MULTI-SURFACE+UV

BIO-ENZYMATIC ORGANIC-BASED ODOR ELIMINATOR

OdorGhost Multi-Surface+UV is a live enzyme engineered for odor removal. Its clinical strength is designed to consume any biological-based odor molecules.

Coverage: 600-800 ft²/gal | Shelf Life: 2 years



ODORGHOST MULTI-SURFACE

BIO-ENZYMATIC ORGANIC-BASED ODOR ELIMINATOR

OdorGhost Multi-Surface is a live enzyme engineered for odor removal. Its clinical strength is designed to consume any biological-based odor molecules.

Coverage: 600-800 ft²/gal | Shelf Life: 2 years

INTERESTED IN
LEARNING MORE?



SCAN QR CODE
FOR MORE DETAILS

On the following pages you will find charts and tables designed to make our products easy to compare and understand.

In addition to product information found in this catalog, we have a growing library of educational content hosted through our digital TAYLOR TIME platform. Scan the QR codes below to **INVEST YOUR TIME** with us.



NOTES:



SIGNATURE LINE[®] AT A GLANCE

SCAN QR CODE
FOR MORE DETAILS



PRODUCT CATEGORY KEY

RESILIENT

WOOD

CARPET

MOISTURE

SPECIALTY

	RESOLUTE [®]	PINNACLE [®]	DYNAMIC [®]	STEADFAST [®]	RIDGELINE [®]	IRONWOOD [®]	ASPEN [®]	IRONWOOD [®] GLUE ASSIST
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Hard-Set, Elastomeric Adhesive	Hard-Set, Transitional Pressure Sensitive Adhesive	Firm-Set, Modified Transitional Pressure Sensitive Adhesive	Clear Thin Spread, Vct Adhesive	Unlimited Moisture Vapor Barrier, Elastomeric Adhesive	95% Moisture Vapor Barrier, Elastomeric Adhesive	90% Moisture Vapor Barrier, Elastomeric Adhesive	Wood Flooring, Glue Assist Adhesive
BASE CHEMISTRY	Modified Urethane (Isocyanate Free)	Hybrid Acrylic	Hybrid Acrylic	Hybrid Acrylic	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)
CURING METHOD	Moisture Cure	Proprietary Cross-Linking	Proprietary Modified Cross-Linking	Evaporation	Moisture Cure	Moisture Cure	Moisture Cure	Moisture Cure
MOISTURE CONTROL	100% RH	No	No	No	100% RH	95% RH	90% RH	No
RH	NTR* (100%)	99%	99%	90%	NTR* (100%)	95%	90%	N/A
PH	NTR* (5-14)	5-12	5-12	5-9	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A
MVER	NTR*	12 lbs	12 lbs	8 lbs	NTR*	15 lbs	10 lbs	N/A
OPEN TIME	0 min	20-30 min (Semi-wet)	20-30 min (Semi-wet)	N/A	0 min	0 min	0 min	0 min
FLASH TIME	10 min	30-60 min	30-60 min (PSA)	30-60 min	N/A	N/A	N/A	N/A
WORKING TIME	45 min	20-30 min (Semi-Wet); 3 hrs (PSA)	20-30 min (Semi-Wet); 12 hrs (PSA)	24 hrs	45 min	45 min	45-60 min	45 min
CURE TIME	6 hrs	12 hrs	12 hrs	24 hrs	12 hrs	12 hrs	12 hrs	12 hrs
LIGHT TRAFFIC	3 hrs	0 min (PSA); 12 hrs (Semi-Wet)	0 min (PSA); 12 hrs (Semi-Wet)	0 min	6 hrs	6 hrs	6 hrs	6 hrs
HEAVY TRAFFIC	4 hrs	24 hrs	24 hrs	24 hrs	6 hrs	6 hrs	6 hrs	6 hrs
ROLLING LOADS	8 hrs	48 hrs	48 hrs	48 hrs	N/A	N/A	N/A	N/A

*NTR = No Testing Required

AGILE [®]	VERSATILE [®]	SAHARA [®]	ZEPHYR [®]	ENHANCE [®]	FINALE [®]	ELEVATE [®]	GRAVITY [®]
Hard-Set, Multi-Purpose Adhesive	Soft-Set, Fully-Repositionable Pressure Sensitive Adhesive	Unlimited Moisture Vapor Barrier, Elastomeric Membrane	95% Moisture Vapor Barrier, Or Encapsulator, Or Primer Coating	Surface Bond Promoter And Encapsulator	Hard-Set, Elastomeric Cove Base Adhesive	Roller Applied Wall Adhesive For Vinyl Plank/ Tile	Anti-Skid Substrate Coating For Floating Floor Installation
Synthetic Latex & Hydrocarbon Resin Blend	Hybrid Acrylic	STPE Polymer-Based (Hybrid Propel [®])	Synthetic Latex Blend	STPE Polymer-Based (Hybrid Propel [®])	Acrylic Latex Blend	Synthetic Latex Blend	Synthetic Latex Blend
Evaporation	Evaporation	Moisture Cure	Evaporation	Moisture Cure	Evaporation	Evaporation	Evaporation
No	No	100% RH	93% RH (1 Coat), 95% RH (2 Coats)	No	N/A	No	85% RH (1 Coat), 90% RH (2 Coats)
90%	95%	NTR* (100%)	93% (1 Coat), 95% (2 Coats)	90%	N/A	N/A	85% (1 Coat), 90% (2 Coats)
5-9	5-10	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A	N/A	5-12
8 lbs	10 lbs	NTR*	10 Lbs (1 Coat); 15 Lbs (2 Coats)	8 Lbs	N/A	N/A	5 Lbs (1 Coat); 10 Lbs (2 Coats)
15-60 min (direct glue down); 30-60 min (underlayment/ double stick cushion to carpet)	N/A	N/A	N/A	N/A	0 min	N/A	N/A
N/A	30-60 min	N/A	N/A	N/A	N/A	30-60 min	N/A
15-120 min (direct glue down); 30-120 min (underlayment/ double stick cushion to carpet)	24 hrs	N/A	N/A	N/A	30 min	2 hrs	N/A
12 hrs	24 hrs	8 hrs	1 hr (per coat)	1-2 hrs	12 hrs	12 hrs	1 hr (per coat)
12 hrs (direct glue down/ underlayment); 24 hrs (double-stick)	0 min	N/A	N/A	N/A	N/A	N/A	N/A
24 hrs (direct glue down/ underlayment); 48 hrs (double-stick)	24 hrs	N/A	N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

ESSENTIALS LINE AT A GLANCE

SCAN QR CODE
FOR MORE DETAILS



PRODUCT CATEGORY KEY

RESILIENT

WOOD

CARPET

SPECIALTY

	2062	ALPINE	TIMBERLINE	2049	REPAIR
PRODUCT TAGLINE	Solvent-Free, Fiberglass Sheet Seam Sealer	Unlimited Moisture Vapor Barrier, Urethane Adhesive	Moisture-Cured Urethane Adhesive	Floating Floor Tongue And Groove Glue	Wood Repair Adhesive
BASE CHEMISTRY	Synthetic Latex Blend	Urethane	Urethane	Poly-vinyl Acetate Emulsion	Hybrid Acrylic
CURING METHOD	Evaporation	Moisture Cured	Moisture Cured	Evaporation	Evaporation
MOISTURE CONTROL	No	100% RH	No	No	No
RH	N/A	NTR* (100%)	75%	N/A	N/A
PH	N/A	NTR* (5-14)	5-9	N/A	N/A
MVER	N/A	NTR*	5 lbs	N/A	N/A
OPEN TIME	N/A	10 min	10 min	0 min	N/A
FLASH TIME	N/A	N/A	N/A	N/A	N/A
WORKING TIME	5-10 min	45-60 min	45-60 min	5-10 min	N/A
CURE TIME	24 hrs	24 hrs	24 hrs	12 hrs	24 hrs
LIGHT TRAFFIC	6 hrs	24 hrs	4 hrs	24 hrs	24 hrs
HEAVY TRAFFIC	6 hrs	24 hrs	12 hrs	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A

*NTR = No Testing Required

900	722	710	EDGE-LOCK	2025
General Purpose Latex Adhesive	Water-Based Pad Adhesive	Multi-Purpose Latex Adhesive	Carpet Edge Sealing Adhesive	Universal Latex Primer Coating
Synthetic Latex & Hydrocarbon Resin Blend	Synthetic Latex & Hydrocarbon Resin Blend	Latex Adhesive	Synthetic Latex Blend	Acrylic Latex
Evaporation	Evaporation	Evaporation	Evaporation	Evaporation
No	No	No	No	No
75%	75%	N/A	N/A	75%
5-9	5-9	N/A	N/A	NTR* (5-14)
5 lbs	3 lbs	N/A	N/A	5 lbs
20-30 min	0 min	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
15-120 min	45-60 min	15-30 min	5-10 min	N/A
48 hrs	12 hrs	24 hrs	12 hrs	30-60 min
12 hrs	N/A	24 hrs	24 hrs	N/A
24 hrs	N/A	24 hrs	24 hrs	N/A
N/A	N/A	N/A	N/A	N/A

SIGNATURE LINE®

								
RESOLUTE®								
PINNACLE®								
DYNAMIC®								
STEADFAST®								
RIDGELINE®								
IRONWOOD®								
ASPEN®								
IRONWOOD® GLUE ASSIST								
AGILE®								
VERSATILE®								
SAHARA®								
ZEPHYR®								
ENHANCE®								
FINALE®								
ELEVATE®								
GRAVITY®								

ESSENTIALS LINE

				
ALPINE				
TIMBERLINE				
2049				
REPAIR				
900				
722				
710				
EDGE-LOCK				
2062				
2025				

SUSTAINABILITY FIRSTS

CERTIFICATIONS

- 1991
- 2007
- 2008
- 2013
- 2014
- Green Label Plus®
- GREENGUARD
- USDA BioPreferred®
- FloorScore®
- Cradle to Cradle®

ACHIEVEMENTS

- 1989
- 1995
- 2006
- 2019
- Developed the first solvent-free flooring adhesive in the U.S.
- Chosen by the EPA as the Exclusive Adhesive for their headquarters
- Introduced the first solvent and isocyanate-free wood adhesive in the U.S.
- Added our products to the mindful MATERIALS Library



INTENSIFY YOUR MOMENTUM



Take TAYLOR With You Every Step™

We offer the most user-friendly, digital experience in our industry.
Visit us online or download our app to stay up-to-date on all things TAYLOR.



TOP WEBSITE FEATURES:

- Product downloads
- Access to TAYLOR TIME
- WHERE TO BUY map
- Clean, modern design
- Easy-to-navigate




◀ VISIT US
ONLINE

TOP APP FEATURES:

- Offline access to documents
- One-touch contact (call/email)
- Automatic updates
- Fast product access
- Easy-to-navigate

DOWNLOAD
OUR APP ▶

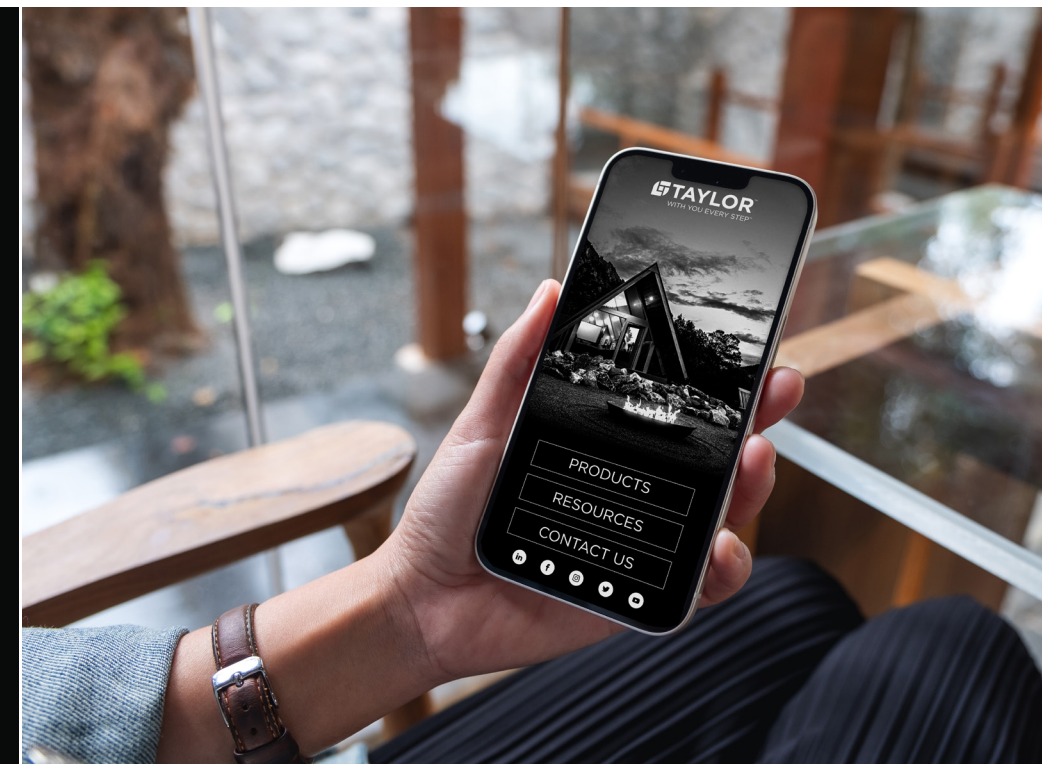

#yourvitalaccessory

THE TAYLOR TECHNICAL DEPARTMENT

TECHNICAL DEPARTMENT HOURS: MONDAY - FRIDAY 8AM TO 8PM EST | 706-712-5823

We are dedicated to the training and success of installers, sales representatives, and the entire flooring industry. Our experienced technicians possess the knowledge and expertise that help uphold our brand promise of being With You Every Step™.

TECHNICAL TEAM SERVICES

Our product testing, troubleshooting and training often make the difference between success and failure. English and Spanish technical support are available throughout North America.

Testing OUR products:

- RH - Moisture tolerance
- MVER - Moisture vapor transmission
- pH - Alkali tolerance
- Viscosity/spread-ability
- Temperature tolerance
- Traffic times
- Peel/sheer strength
- Bond strength
- Compatibility/performance
- Rolling-load testing

Testing YOUR products:

- Strength
- Dimensional stability
- Plasticizer migration
- Moisture tolerance
- Environmental performance (heat, cold, humidity)

Troubleshooting:

- Moisture issues
- Substrate history
- Substrate conditions
- Substrate preparation
- Adhesives/coatings
- Flooring materials
- Warranty coverage
- Job-site inspections
- Compatibility
- Peaking, gapping, cupping

Training:

- Product knowledge
- Installation skills
- Best practices
- General knowledge
- Installation techniques
- Product selection
- Substrate preparation
- Adhesive application
- Terminology
- Acclimation
- Custom sessions
- How-to-videos

WHAT'S INSIDE OUR TAYLOR TECHNICAL & TRAINING CENTER (T³C)?

Located in Dalton, GA, our T³C serves as a central support hub and an extension of our customers technical departments. Inside our T³C facility you will find the following:

- State-of-the-art classroom
- Product testing rooms
- Hands-on application areas
- Custom rolling-load testing lab
- Moisture modules
- Environmental chamber
- TAYLOR TIME studio
- Conference room
- Shipping/Receiving center
- Technical team offices

HOW OUR TECHNICAL TEAM CAN HELP

No matter where you are, our Technical Team is here to help. We can host you at our facility, come to your job-site or locations, or assist you through digital options.

- T³C (Taylor Technical & Training Center)
- Flooring manufacturing plants
- Flooring manufacturer testing facilities
- Distributor locations
- On-site locations
- Email/text
- On-call 706-712-5823
- Video chats
- Live webinars
- Installation videos
- How-to videos
- Bilingual support


























































◀ SCAN TO FIND
OUT MORE

SIGNATURE LINE® APPROVED FLOORING TYPES

NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

Flooring Type		Resolute®	Pinnacle®	Dynamic®	Steadfast®
Resilient	Linoleum				
	Modular (LVP, LVT)				
	Modular (Rigid Core - Dryback)				
	Modular (SVT, VET)				
	Modular (VCT)				
	Modular (Woven)				
	Rubber (CRUMB)				
	Rubber (Sheet & Tile)				
	Sheet (Felt-Backed)				
	Sheet (Fiberglass)				
	Sheet (Heterogeneous)				
	Sheet (Homogeneous)				
	Sheet (Woven)				
	Stair Treads (Rubber, Vinyl)				
	Wood	Acrylic Infused Plank			
Bamboo (Strand Woven)					
Bamboo (Not Strand Woven)					
Cork (Flooring)					
Cork (Cork-Backed Hard Surface)					
Cork (Underlayment)					
Hardwood (Engineered, Parquet)					
Hardwood (Solid)					
Carpet	Artificial Turf				
	Broadloom (6-Ft Vinyl-Backed)				
	Broadloom (Action-Bac, Jute-Back)				
	Broadloom (Carpet Pad)				
	Broadloom (Double Stick - Carpet to Cushion)				
	Broadloom (Double Stick - Cushion to Substrate)				
	Broadloom (Hot-Melted-Backed)				
	Broadloom (HP & Vinyl-Backed)				
	Broadloom (Non-Vinyl-Backed Patterned)				
	Broadloom (Polyurethane, Rubber-Backed)				
	Broadloom (Unitary & Unitary Action-Bac)				
	Broadloom (Woven-Backed)				
	Modular (Hard-Backed Carpet Tile)				
	Modular (Soft-Backed Carpet Tile)				
	Modular (Walk-Off Carpet Tile)				

RIDGELINE®	IRONWOOD®	ASPEN®	IRONWOOD® GLUE ASSIST	AGILE®	VERSATILE®
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					 
					
					
					
					
					 
					
					
					
					 
					



Scan QR code for complete product information.













For more details visit
tayloradhesives.com.



Scan or search for
Taylor Adhesives
in the app store to
download our app.

ESSENTIALS LINE APPROVED FLOORING TYPES

NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

FLOORING TYPE		2062	ALPINE	TIMBERLINE
RESILIENT	LINOLEUM			
	MODULAR (LVP, LVT)			
	MODULAR (RIGID CORE - DRYBACK)			
	MODULAR (SVT, VET)			
	MODULAR (VCT)			
	MODULAR (WOVEN)			
	RUBBER (CRUMB)			
	RUBBER (SHEET & TILE)			
	SHEET (FELT-BACKED)			
	SHEET (FIBERGLASS)			
	SHEET (HETEROGENEOUS)			
	SHEET (HOMOGENEOUS)			
	SHEET (WOVEN)			
	STAIR TREADS (RUBBER, VINYL)			
	WOOD	ACRYLIC INFUSED PLANK		
BAMBOO (STRAND WOVEN)				
BAMBOO (NOT STRAND WOVEN)				
CORK (FLOORING)				
CORK (CORK-BACKED HARD SURFACE)				
CORK (UNDERLAYMENT)				
HARDWOOD (ENGINEERED, PARQUET)				
HARDWOOD (SOLID)				
CARPET	ARTIFICIAL TURF			
	BROADLOOM (6-FT VINYL-BACKED)			
	BROADLOOM (ACTION-BAC, JUTE-BACK)			
	BROADLOOM (CARPET PAD)			
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)			
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)			
	BROADLOOM (HOT-MELTED-BACKED)			
	BROADLOOM (HP & VINYL-BACKED)			
	BROADLOOM (NON-VINYL-BACKED PATTERNED)			
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)			
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)			
	BROADLOOM (WOVEN-BACKED)			
	MODULAR (HARD-BACKED CARPET TILE)			
	MODULAR (SOFT-BACKED CARPET TILE)			
	MODULAR (WALK-OFF CARPET TILE)			

[illegible]

Scan QR code for complete product information.



For more details visit
tayloradhesives.com.



Scan or search for
Taylor Adhesives
in the app store to
download our app



IMPACT YOUR SUCCESS



#yourvitalaccessory

Trowel measurements = width x depth x spacing

IMPORTANT NOTE: Always use an approved tool that is in good condition.
This maintains performance and protects your warranty.



V Notch
3/32" x 3/32" x 3/32"
2.4mm x 2.4mm x 2.4mm



V Notch
1/8" x 1/8" x 1/16"
3.2mm x 3.2mm x 1.6mm



V Notch
1/4" x 1/4"
6.35mm x 6.35mm



V Notch
3/16" x 1/4" x 5/16"
4.8mm x 6.4mm x 7.9mm



V Notch
3/16" x 5/32"
4.8mm x 4.0mm



V Notch
1/2" x 15/32"
12.7mm x 11.9mm



Short Nap Paint Roller
1/2"
12.7mm



U Notch
1/8" x 1/8" x 1/16"
3.2mm x 3.2mm x 1.6mm



U Notch
1/16" x 1/32" x 5/64"
1.6mm x 0.8mm x 2mm



U Notch
1/16" x 1/32" x 1/32"
1.6mm x 0.8mm x 0.8mm



Square Notch
1/16" x 1/16" x 1/16"
1.6mm x 1.6mm x 1.6mm



Square Notch
1/8" x 1/8" x 1/8"
3.2mm x 3.2mm x 3.2mm



Square Notch
1/4" x 1/4" x 1/4"
6.4mm x 6.4mm x 6.4mm



Square Notch
1/4" x 1/4" x 3/8"
6.4mm x 6.4mm x 9.5mm



Short Nap Paint Roller
3/8"
9.5mm

APPROVED TOOLS

SIGNATURE LINE® APPROVED INSTALLATION TOOLS

RESILIENT	PRODUCT	TOOL	FLOORING TYPE	COVERAGE
	RESOLUTE®	MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP, LVT, SVT, VCT, VET), Sheet (felt-backed, fiberglass, heterogeneous, homogeneous, woven)	180-250 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Modular (rigid core [dryback] woven), Rubber (crumb, sheet tile), Stair Treads (rubber vinyl) CARPET: Modular (hard-backed, soft-backed, walk-off) WOOD: Cork (flooring, cork-backed hard surface, underlayment)	75-125 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/8" x 1/8" x 1/16" U Notch	CARPET: Artificial Turf	50-65 ft²/gal
	PINNACLE®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP/LVT [non-porous], SVT, VCT, VET), Sheet (heterogeneous/homogeneous/woven [non-porous]), Stair Treads (rubber, vinyl) CARPET: Broadloom (6 ft vinyl-backed) WOOD: Cork (cork-backed hard surface, underlayment)	220-260 ft²/gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Modular (LVP/LVT [porous], rigid core [dryback], woven) Rubber (crumb, sheet, tile), Sheet (heterogeneous/homogeneous/ woven [porous]), Stair Treads (rubber/vinyl) CARPET: Broadloom (6 ft vinyl-backed,) WOOD: Cork (cork-backed hard surface, underlayment)	150-180 ft²/gal
		BOND ONLY 3/8" Short Nap Paint Roller	RESILIENT: Sheet (fiberglass)	Up to 350 ft²/gal
	DYNAMIC®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (LVP/LVT [non-porous], SVT, VCT, VET), Sheet (heterogeneous/homogeneous [non-porous]) Stair Treads (rubber/vinyl [non-porous]) CARPET: Modular (hard-backed/soft-backed [non-porous])	220-260 ft²/gal
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Modular (LVP/LVT [porous], rigid core [dryback]) Rubber (crumb, sheet, tile), Sheet (heterogeneous/homogeneous [porous]), Stair Treads (rubber/vinyl [porous]) CARPET: Broadloom (6 ft vinyl-backed, double-stick-cushion-to-substrate) Modular (hard-backed/soft-backed [porous], walk-off) WOOD: Cork (cork-backed hard surface, underlayment)	150-180 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, HP & vinyl-backed, polyurethane, rubber-backed, unitary Action-Bac)	90-120 ft²/gal (10-14 yd²/gal)
		BOND ONLY 1/8" x 1/8" 1/16" U Notch	CARPET: Broadloom (double-stick carpet-to-cushion, unitary, woven-backed)	50-65 ft²/gal (6-7 yd²/gal)
		BOND ONLY 3/8" Short Nap Paint Roller	RESILIENT: Sheet (fiberglass) CARPET: Modular (hard-backed)	Up to 350 ft²/gal
WOOD	STEADFAST™	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	RESILIENT: Modular (VCT [porous])	220-260 ft²/gal
		BOND ONLY 1/16" x 1/32" 5/64" U Notch	RESILIENT: Modular (VCT [non-porous])	Up to 300 ft²/gal
	RIDGELINE®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide])	25-30 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks greater than 6' long and 5" wide])	Up to 20 ft²/gal
	IRONWOOD®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide"])	25-30 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks greater than 6' long and 5" wide"])	Up to 20 ft²/gal
	ASPEN®	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, cork-backed hard-surface, underlayment), Hardwood (parquet)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid) RESILIENT: Rubber (crumb)	Up to 50 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks less than 6' long and 5" wide"])	25-30 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, solid [planks greater than 6' long and 5" wide"])	Up to 20 ft²/gal
	IRONWOOD® GLUE ASSIST	BOND ONLY Tip Applicator Included	WOOD: Acrylic Infused Plank, Bamboo, Hardwood (engineered, parquet, solid)	Dependent upon user

CARPET	PRODUCT	TOOL	FLOORING TYPE	COVERAGE
	AGILE®	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Linoleum, Sheet (felt-backed) WOOD: Cork (underlayment)	150-180 ft²/gal (16-20 yd²/gal)
		BOND ONLY 3/32" x 3/32" x 3/32" V Notch	CARPET: Broadloom (double-stick cushion-to-substrate, polyurethane, rubber-backed) WOOD: Cork (cork-backed hard surface)	90-120 ft²/gal (10-14 yd²/gal)
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed)	90-120 ft²/gal (10-14 yd²/gal)
		BOND ONLY 1/8" x 1/8" x 1/16" U Notch	CARPET: Broadloom (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	50-65 ft²/gal (5-7 yd²/gal)
	VERSATILE®	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	CARPET: Broadloom (6 ft vinyl-backed, HP & vinyl-backed) RESILIENT: Modular (LVP, LVT, VCT, [non-porous])	220-260 ft²/gal (24-29 yd²/gal)
		BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	CARPET: Broadloom (double-stick cushion-to-substrate) Modular (hard-backed, soft-backed) RESILIENT: Modular (LVP, LVT, VCT, [porous]) WOOD: Cork (underlayment)	150-180 ft²/gal (16-20 yd²/gal)
		BOND ONLY 3/8" Short Nap Paint Roller	RESILIENT: Sheet (fiberglass) CARPET: Broadloom (6 ft vinyl-backed, HP & vinyl-backed) Modular (hard-backed)	Up to 350 ft²/gal (up to 39 yd²/gal)
	SAHARA®	MOISTURE BARRIER 1/8" x 1/8" x 1/16" V Notch	For use under all glue-down, loose-lay, and floating floors	90-120 ft²/gal
	ZEPHYR®	MOISTURE BARRIER 3/8" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors	350 ft²/gal (1 coat) 200 ft²/gal (2 coats)
SPECIALTY	ENHANCE®	PRIMER ONLY 1/2" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors	Up to 250 ft²/gal
	FINALE®	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	Approved base types: rubber, vinyl, rubber-vinyl blends, carpet	2" base - up to 560 lf/gal 4" base - up to 280 lf/gal 6" base - up to 187 lf/gal
	ELEVATE®	BOND ONLY 3/8" Short Nap Paint Roller	Approved LVP, LVT	250-300 ft²/gal
	GRAVITY®	MOISTURE BARRIER & ANTI-SKID 3/8" Short Nap Paint Roller	Approved floating flooring products	Up to 350 ft²/gal

PRODUCT CATEGORY KEY



RESILIENT



MOISTURE



WOOD



SPECIALTY



CARPET



For more details visit
tayloradhesives.com.



Scan or search for
Taylor Adhesives
in the app store to
download our app.

ESSENTIALS LINE APPROVED INSTALLATION TOOLS

	PRODUCT	TOOL	FLOORING TYPE	COVERAGE
WOOD	2062	Applicator Tip	RESILIENT: Sheet (fiberglass)	225 lf/8oz
	ALPINE	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	WOOD: Wood flooring up to 5/8" thick, Cork (flooring, cork-backed hard surface, underlayment)	30-35 ft²/gal
		MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	Wood flooring greater than 5/8" thick, multi-ply engineered plank	20 ft²/gal
		BOND ONLY 3/16" x 5/32" V Notch	Wood flooring up to 1/2" thick	50 ft²/gal
		BOND ONLY 1/4" x 1/4" 1/4" Sq Notch	Wood flooring up to 3/4" thick	30 ft²/gal
	TIMBERLINE	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	WOOD: Cork (underlayment), RESILIENT: Rubber (crumb)	150-180 ft²/gal
		BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	WOOD: Cork (flooring, underlayment), Hardwood (parquet) RESILIENT: Rubber (crumb)	60-70 ft²/gal
		BOND ONLY 3/16" x 1/4" x 5/16" V Notch	WOOD: Acrylic Infused Plank, Bamboo (not strand woven), Cork (flooring, cork-backed hard surface, underlayment), Hardwood (engineered, parquet, solid)	Up to 50 ft²/gal
	2049	BOND ONLY Applicator tip	WOOD: Acrylic Infused Plank, Hardwood (engineered, parquet)	400 lf/16oz
	REPAIR	BOND ONLY Syringe/kit	WOOD: Hardwood (engineered only)	Dependant upon user
CARPET	900	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	RESILIENT: Sheet (felt-backed [porous])	150-180 ft²/gal (16-20 yd²/gal)
		BOND ONLY 1/8" x 1/8" x 1/16" V Notch	CARPET: Broadloom (Action-Bac, jute-back)	90-120 ft²/gal (10-14 yd²/gal)
	722	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	-1000 lf/gal
	710	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	-1200 lf/gal
	EDGE-LOCK	BOND ONLY Tip Applicator Included	CARPET: Broadloom (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	-75 lf/8oz
	SPECIALTY	2025	PRIMER ONLY 3/8" Short Nap Paint Roller	For use under all glue-down, loose-lay, and floating floors

PRODUCT CATEGORY KEY

-  RESILIENT
-  CARPET
-  WOOD
-  SPECIALTY



Scan QR code for complete product information.



For more details visit tayloradhesives.com.



Scan or search for Taylor Adhesives in the app store to download our app.



INVEST
YOUR TIME



#yourvitalaccessory



PACKAGING & SHIPPING

SIGNATURE LINE®

CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/ UNIT	UNIT WEIGHT*	UNITS/ PALLET	SHELF LIFE
RESILIENT	Resolute®	2 gal	Plastic Pail	719692-022671	1	19 lbs	60	1 year
		4 gal	Plastic Pail	719692-024057	1	37 lbs	48	1 year
	Pinnacle®	1 gal	Plastic Pail	719692-022657	4	35 lbs	45	2 years
		4 gal	Plastic Pail	719692-022640	1	35 lbs	48	
	Dynamic®	1 gal	Plastic Pail	719692-022626	4	37 lbs	45	2 years
		4 gal	Plastic Pail	719692-022619	1	37 lbs	48	
	Steadfast®	1 gal	Plastic Pail	719692-023029	4	36 lbs	45	2 years
		4 gal	Plastic Pail	719692-023012	1	36 lbs	48	
WOOD	Ridgeline®	4 gal	Plastic Pail	719692-022572	1	44 lbs	48	1 year
	Ironwood®	4 gal	Plastic Pail	719692-022633	1	43 lbs	48	1 year
	Aspen®	4 gal	Plastic Pail	719692-023388	1	43 lbs	48	1 year
	Ironwood® Glue Assist	28 oz	Plastic Cartridge	719692-023623	12	28 lbs	40	1 year
		20 oz	Sausage Tube	719692-023999	12	20	60	1 year
CARPET	Agile®	4 gal	Plastic Pail	719692-023074	1	43 lbs	48	2 years
	Versatile®	1 gal	Plastic Pail	719692-022763	4	37 lbs	45	2 years
		4 gal	Plastic Pail	719692-022701	1	37 lbs	48	
MOISTURE	Sahara®	2 gal	Plastic Pail	719692-022749	1	17 lbs	60	1 year
	Zephyr®	4 gal	Plastic Pail	719692-022732	1	37 lbs	48	2 years
SPECIALTY	Enhance®	2 gal	Plastic Pail	719692-023258	1	27 lbs	60	1 year
	Finale®	10 oz	Plastic Cartridge	719692-023067	12	12 lbs	60	2 years
		30 oz	Plastic Cartridge	719692-023050	12	35 lbs	50	
		1 gal	Plastic Pail	719692-023043	4	48 lbs	45	
		4 gal	Plastic Pail	719692-023036	1	48 lbs	48	
	Elevate™	1 gal	Plastic Pail	719692-023968	4	37 lbs	45	2 years
	Gravity™	4 gal	Plastic Pail	719692-023982	1	36 lbs	48	2 years

ESSENTIALS LINE

CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/ UNIT	UNIT WEIGHT*	UNITS/ PALLET	SHELF LIFE
RESILIENT	2062	8 oz	Squeeze Bottle	719692-021063	12	8 lbs	60	2 years
WOOD	Alpine™	4 gal	Metal Pail	719692-024101	1	48 lbs	48	1 year
	Timberline™	4 gal	Metal Pail	719692-023913	1	48 lbs	48	1 year
	2049	16 oz	Squeeze Bottle	719692-022183	12	28 lbs	96	2 years
	Repair	1 qt	Plastic Bottle	719692-024118	6	14 lbs	60	1 year
	Repair Kit	Box	Cardboard Box	719692-024125	8	24 lbs	48	1 year
CARPET	900	4 gal	Plastic Pail	719692-001492	1	42 lbs	48	2 years
	722	1 gal	Plastic F-Style	719692-001362	4	45 lbs	48	2 years
	710	1 qt	Squeeze Bottle	719692-001331	12	26 lbs	48	6 months
		1 gal	Plastic F-Style	719692-001348	4	34 lbs	48	
	Edge-Lock	8 oz	Squeeze Bottle	719692-023982	12	8 lbs	60	6 months
SPECIALTY	2025	1 gal	Plastic F-Style	719692-021025	4	37 lbs	48	2 years
		4 gal	Plastic Pail	719692-015772	1	37 lbs	48	



Scan QR code for complete product information.

ADDITIONAL ITEMS

CATEGORY	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/ UNIT	UNIT WEIGHT*	UNITS/ PALLET	SHELF LIFE
RESILIENT	2037	1 gal	Plastic Pail	719692-021117	4	38 lbs	45	2 years
		4 gal	Plastic Pail	719692-021049	1	38 lbs	48	
CARPET	501	1 gal	Plastic Pail	719692-002260	2	13 lbs	75	1 year
	2070	4 gal	Plastic Pail	719692-001737	1	42 lbs	48	2 years
	2055	4 gal	Plastic Pail	719692-001676	1	44 lbs	48	2 years
	2089	4 gal	Plastic Pail	719692-016304	1	44 lbs	48	2 years
	720	1 gal	Metal F-Style	719692-001355	4	33 lbs	60	1 year
	720-C	1 gal	Metal F-Style	719692-016427	4	33 lbs	60	1 year
	757	4 gal	Metal Pail	719692-001430	1	40 lbs	48	1 year
	775	1 qt	Metal Container	719692-001461	12	25 lbs	60	1 year
	775-C	1 qt	Metal Container	719692-015598	12	25 lbs	60	1 year
SPECIALTY	901	1 gal	Plastic Pail	719692-014027	4	54 lbs	45	1 year
		3.5 gal	Plastic Pail	719692-010357	1	48 lbs	48	
	1N	1 qt	Metal Container	719692-002086	12	23 lbs	48	1 year
		1 gal	Metal Container	719692-002093	4	29 lbs	45	
		4 gal	Metal Pail	719692-002109	1	32 lbs	48	
	1N-C	1 pt	Metal Container	719692-015543	12	13 lbs	60	1 year
		1 gal	Metal Container	719692-015567	4	29 lbs	45	
	725	12 oz	Aerosol Spray	719692-016779	12	16 lbs	48	1 year
	OdorGhost™ + UV	1 gal	Plastic F-Style	719692-023869	4	36 lbs	48	1 year
	OdorGhost™	1 gal	Plastic F-Style	719692-023852	4	36 lbs	48	1 year

PRODUCTION
CODE KEY

- SAMPLE CODE: **D2C2325** = Dalton, 2022, March, Part #
- D 2C2325** = The first character designates where the product was manufactured
Example: **D** = Dalton **F** = Fontana **T** = Texas
- D 2 C2325** = The second character designates the year of manufacture
Example: **9** = 2019 **0** = 2020 **1** = 2021 **2** = 2022
- D2 C 2325** = The third character designates the month of manufacture
Example: **A** = Jan **B** = Feb **C** = March **D** = April
- D2C 2325** = The last four numbers are the products part number

STORAGE REQUIREMENTS
All TAYLOR products should be stored in their original container, unopened, at temperatures between 50-90°F (10-32° C). While most products are freeze-thaw stable (10°F [-12°C]), it is necessary to protect them from freezing. Some products must be protected from freezing. See each product’s technical data sheet (TDS) for complete details.



For more details visit
tayloradhesives.com.



Scan or search for
Taylor Adhesives
in the app store to
download our app.

#yourvitalaccessory



**MADE IN THE
USA**

📞 800.868.4583

💻 tayloradhesives.com

📍 800 College Drive, Dalton, GA 30720

