



PRODUCT CATALOG

Flooring Adhesives Since 1977



TAYLOR

04 TIMELINE

RESILIENT COLLECTIONS

08 INTRODUCTION

10 RESOLUTE®

11 PINNACLE®

12 DYNAMIC®

13 STEADFAST®

14 2062

WOOD COLLECTIONS

20 INTRODUCTION

22 RIDGELINE®

23 IRONWOOD®

24 ASPEN®

25 IRONWOOD® GLUE ASSIST

26 ALPINE™

CARPET COLLECTIONS

34 INTRODUCTION

36 AGILE®

37 VERSATILE®

38 900

38 722

38 710

38 EDGE-LOCK

39 720/720-C

MOISTURE + SPECIALTY COLLECTIONS

46 INTRODUCTION

48 SAHARA®

49 ZEPHYR®

50 ENHANCE®

51 FINALE®

52 ELEVATE®

53 GRAVITY®

54 2025

TAYLOR

60 TECHNICAL DEPARTMENT

62 PRODUCT WARRANTIES

64 SUSTAINABILITY

06 YOUR VITAL ACCESSORY

14 2037

14 501

16 APPROVED FLOORING TYPES

18 COLLECTION AT A GLANCE

19 APPROVED INSTALLATION TOOLS

27 TIMBERLINE™

28 2049

28 REPAIR™

30 APPROVED FLOORING TYPES

32 COLLECTION AT A GLANCE

33 APPROVED INSTALLATION TOOLS

39 775/775-C

39 2055

39 2070

39 2089

39 757

40 APPROVED FLOORING TYPES

42 COLLECTION AT A GLANCE

44 APPROVED INSTALLATION TOOLS

54 901

54 1N/1N-C

55 ODORGHOST MULTI-SURFACE + UV

55 ODORGHOST MULTI-SURFACE

55 725

56 COLLECTION AT A GLANCE

58 APPROVED INSTALLATION TOOLS

66 ASSOCIATIONS + GROUPS

68 PACKAGING & SHIPPING

Welcome to **TAYLOR ADHESIVES**, the flooring industry's premier adhesive specialist. With a legacy of success since 1977, we are now supported by a world-wide and diverse adhesives leader: **Meridian Adhesives Group**.

TAYLOR produces a complete collection of adhesives, primers, and coatings for resilient, wood, and carpet flooring installations as well as moisture protection products. We proudly back the performance of our products with the strongest warranties in the industry.

At **TAYLOR**, every product comes with our brand promise of being **WITH YOU EVERY STEP™**.



<p>Wally Taylor started W.F. Taylor as a carpet adhesive supplier</p>  <p>1977</p>	<p>Relocated our headquarters to Dalton, GA</p>  <p>2016</p>	<p>Opened our TAYLOR Technology & Training Center (T³C) in Dalton, GA to support customers and installers</p> <p>2017</p>	<p>TAYLOR joined Meridian Adhesives Group as the flagship brand of the Flooring Division</p>  <p>2018</p>	<p>Polycom joined TAYLOR as part of the Flooring Division</p>  <p>2019</p>	<p>Launched TAYLOR TIME, our branded training and education platform</p> <p>+</p> <p>Became the premier adhesive supplier of CFI</p> <p>+</p> <p>Founded the TAYLOR Advisory Council (TAC)</p>    <p>2020</p>	<p>Frontier joined TAYLOR as part of the Flooring Division</p>  <p>2021</p>
---	--	---	--	--	--	---

corporate achievements

TAYLOR

timeline

technical achievements

<p>2001</p> <p>Introduced Meta-Tec technology with a superior cross-linking system, achieving high-shear strength and a waterproof bond</p>	<p>2006</p> <p>Launched MS Plus with Meta-Tec for safer and easier wood installations - solvent and isocyanate free</p>	<p>2008</p> <p>Introduced MS Plus Advance, the most innovative wood flooring adhesive with moisture and sound control</p> 	<p>2016</p> <p>Introduced Sahara®, our first unlimited moisture mitigation coating for concrete</p> 	<p>2017</p> <p>Launched our Signature Line® product collection</p> 	<p>2021</p> <p>Introduced our Essentials Line, and color-coded labels with Spanish and French translations</p>	<p>2022</p> <p>Introduced Gravity®, the industry's first anti-skid coating for loose lay installations</p> <p>+</p> <p>Introduced Elevate®, our first wall adhesive</p>  
--	--	--	--	---	---	--

YOUR VITAL ACCESSORY

At **TAYLOR**, we are made different. We believe our people, our products, and our service create an unrivaled level of partnership. As your vital accessory, we can enhance your performance, reputation, profitability, momentum and success.

We invite you to come experience what makes us different:

- › **Trusted industry leader for over 45 years**
 - › **Proven history of innovation (see page 6)**
 - › **Specialists in adhesives & coatings**
 - › **Focused on sustainability**
 - › **Top-rated brand for 17 consecutive years**
- › **The Flooring Division of the Meridian Adhesives Group**
 - › **Highly collaborative**
 - › **Partner-centric**
 - › **Open and transparent communication**
 - › **Dedicated to industry training & education**

MANUFACTURING & DISTRIBUTION

- › 3 TAYLOR manufacturing facilities (CA, GA, TX)
 - Warehousing & shipping - FOB
 - Strategic location access (rail, interstate)
- › Distribution options (shipping, pricing, inventory)
 - FOB – 3 Canadian warehouses
 - FOB – 10 Meridian warehouses
 - FOB – TAYLOR wholesale distributors
 - Hybrid programs available

ACCOUNT MANAGEMENT

- › World-class service and quality
- › Outstanding management and support
- › Collaboration on promotional opportunities
- › Partnership approach
- › Responsive customer support

TECHNICAL DEPARTMENT

- › Product testing (flooring, adhesives, coatings)
- › Troubleshooting (on-site, in-person, remote)
- › Product training (on-site, in-person, remote)
- › Technical assistance (on-site, in-person, remote)
- › Bi-lingual support (English/Spanish)
- › 1-Hour Response Guarantee

R&D DEPARTMENT

- › Discovery and consulting
- › Ongoing product innovations
- › Product development
- › Quality control management
- › Certifications and sustainability



Adhesives that go the distance...

Meridian's solutions enhance daily life on Earth and beyond.



LEARN MORE



With 26 sites strategically located in 9 countries, our global presence is your advantage. Meridian Adhesives plays a pivotal role in products that can be found everywhere from the floors you walk on all the way into outer space.

Learn more at meridianadhesives.com



INTRODUCING THE ENTIRE RESILIENT COLLECTION

Signature Line®

- **RESOLUTE®**
INDOOR/OUTDOOR UNLIMITED MOISTURE PROTECTION
AND SOUND CONTROL ADHESIVE
- **PINNACLE®**
HARD-SET, HIGH-MOISTURE TOLERANT ADHESIVE
- **DYNAMIC®**
FIRM-SET, HIGH-MOISTURE TOLERANT ADHESIVE
- **STEADFAST®**
CLEAR THIN SPREAD VCT ADHESIVE

Essentials Line

- **2062**
FIBERGLASS SHEET SEAM SEALER

Additional Products

- **2037**
FIBERGLASS SHEET PSA
- **501**
SOLVENT-FREE EPOXY





INDOOR/OUTDOOR
APPLICATION

SIGNATURE LINE® RESOLUTE®

UNLIMITED MOISTURE VAPOR BARRIER, HARD-SET, ELASTOMERIC ADHESIVE

• Unlimited moisture protection (see TDS) • Cost savings potential • No moisture or pH testing required • No sub-slab moisture barrier required (see TDS) • Topical liquid resistance (water, spills, etc.) • Permanent, waterproof bond • 1-step installation (no stirring/mixing) • Self-healing, elastomeric membrane • Excellent plasticizer migration resistance • Faster construction timeline • 6-hour cure (heat weld, wet mop, strip/finish) • Rapid occupancy times • Extreme heavy rolling loads • Installs multiple flooring types • Sound control (IIC, STC) • Low VOC, extremely low odor • Antimicrobial technology

RH NTR* 100%	PH NTR* 5-14	MVER NTR*	OPEN TIME 0-15 MIN	WORKING TIME 45 MIN	CURE TIME 6 HRS	EXTREMELY LOW ODOR	
LIGHT TRAFFIC 3 HRS	HEAVY TRAFFIC 4 HRS	ROLLING LOADS 8 HRS	ΔIIC 18 dB**	IIC 68 dB**	STC 66 dB**	COVERAGE: 50-250 ft²/gal AVAILABLE IN: 2 and 4 gal SHELF LIFE: 1 year	

*NTR = No Testing Required | **Sound ratings based on 6" concrete slab overlaid with 3.2 mm LVP flooring
NOTE: Exterior applications warranted only with approved exterior rated flooring products.

SIGNATURE LINE® PINNACLE®

HARD-SET, TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

• Aggressive tack, fast grab • High moisture tolerance • Permanent, waterproof bond • High-strength, elastomeric bond • Ideal for heavy rolling loads • Immediate access for light traffic • Installs multiple flooring types • ColorReady® technology • Excellent plasticizer migration resistance • Low VOC, extremely low odor • Antimicrobial technology

RH 99%	PH 5-12	MVER 12 LBS	FLASH TIME 30-60 MIN*	OPEN TIME 20-30 MIN (Semi-wet)	WORKING TIME 3 HRS* (see page 18)	CURE TIME 12 HRS	
LIGHT TRAFFIC 0 MIN* (see page 18)	HEAVY TRAFFIC 24 HRS	ROLLING LOADS 48 HRS	EXTREMELY LOW ODOR	COVERAGE: 150-350 ft²/gal AVAILABLE IN: 1 and 4 gal SHELF LIFE: 2 years			

*Data reference PSA usage only. See technical data sheet for complete details
NOTE: Pinnacle is a high moisture tolerant adhesive but does not provide moisture protection.



CAN ALSO BE USED
WITH MANY
CARPET FLOORING
APPLICATIONS

SIGNATURE LINE®

DYNAMIC®

FIRM-SET, MODIFIED TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

- Aggressive tack, fast grab • High moisture tolerance • High-strength, water-resistant bond • Repositionable installation • Immediate access for light traffic • Handles heavy rolling loads • Attractive price point • Installs multiple flooring types • 12 hours of working time • ColorReady® technology • Simple installation • Elastomeric bond • Plasticizer migration resistance • Low VOC, extremely low odor • Antimicrobial technology



RH 99%

PH 5-12

MVER 12 LBS

FLASH TIME 30-60 MIN*

OPEN TIME 20-30 MIN (Semi-wet)

WORKING TIME 12 HRS*

CURE TIME 12 HRS

LIGHT TRAFFIC 0 MIN*

HEAVY TRAFFIC 24 HRS

ROLLING LOADS 48 HRS

EXTREMELY LOW ODOR



COVERAGE: 50-350 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years

*Data reference PSA usage only. See technical data sheet for complete details
NOTE: Dynamic is a high moisture tolerant adhesive but does not provide moisture protection.



SIGNATURE LINE®

STEADFAST®

CLEAR THIN SPREAD, VCT ADHESIVE

- High strength, water-resistant bond • Immediate access for light traffic • Competitive price point • 24 hours of working time • Warranted over cutback residue (see TDS) • Simple installation • Elastomeric bond • Handles heavy rolling loads • Designed specifically for VCT flooring • Low VOC, extremely low odor • Antimicrobial technology



RH 90%

PH 5-9

MVER 8 LBS

FLASH TIME 30-60 MIN

WORKING TIME 24 HRS

CURE TIME 24 HRS

LIGHT TRAFFIC 0 MIN

HEAVY TRAFFIC 24 HRS

ROLLING LOADS 48 HRS

EXTREMELY LOW ODOR



COVERAGE: 220-300 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years

SYNTHETIC LATEX BLEND



2062

SOLVENT-FREE, FIBERGLASS SHEET SEAM SEALER

COVERAGE: 225 lf/8oz
AVAILABLE IN: 8 oz
SHELF LIFE: 2 years



HYBRID ACRYLIC



2037

**FIBERGLASS BACKED SHEET VINYL
PRESSURE SENSITIVE® ADHESIVE**

COVERAGE: Up to 350 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years



2-PART EPOXY



501

SOLVENT-FREE EPOXY FLOORING ADHESIVE

COVERAGE: 180-250 ft²/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 1 year



Notes:



FIRM-SET, MODIFIED TRANSITIONAL PRESSURE SENSITIVE® ADHESIVE

- **Installs over 30 flooring types**
- **Immediate access for light traffic**
- **Aggressive tack, fast grab**



**SCAN TO
LEARN MORE**

RESILIENT COLLECTION *approved flooring types*








NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

FLOORING TYPE		RESOLUTE®	PINNACLE®	DYNAMIC®
RESILIENT	LINOLEUM			
	MODULAR (LVP, LVT)			
	MODULAR (RIGID CORE - DRYBACK)			
	MODULAR (SVT, VET)			
	MODULAR (VCT)			
	MODULAR (WOVEN)			
	RUBBER (CRUMB)			
	RUBBER (SHEET & TILE)			
	SHEET (FELT-BACKED)			
	SHEET (FIBERGLASS)			
	SHEET (HETEROGENEOUS)			
	SHEET (HOMOGENEOUS)			
	SHEET (WOVEN)			
	STAIR TREADS (RUBBER, VINYL)			
WOOD	ACRYLIC INFUSED PLANK			
	BAMBOO (STRAND WOVEN)			
	BAMBOO (NOT STRAND WOVEN)			
	CORK (FLOORING)			
	CORK (CORK-BACKED HARD SURFACE)			
	CORK (UNDERLAYMENT)			
	HARDWOOD (ENGINEERED, PARQUET)			
	HARDWOOD (SOLID)			
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)			
	BROADLOOM (6-FT VINYL-BACKED)			
	BROADLOOM (ACTION-BAC, JUTE-BACK)			
	BROADLOOM (CARPET PAD)			
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)			
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)			
	BROADLOOM (HOT-MELTED-BACKED)			
	BROADLOOM (HP & VINYL-BACKED)			
	BROADLOOM (NON-VINYL-BACKED PATTERNED)			
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)			
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)			
	BROADLOOM (WOVEN-BACKED)			
	MODULAR (HARD-BACKED CARPET TILE)			
	MODULAR (SOFT-BACKED CARPET TILE)			
	MODULAR (WALK-OFF CARPET TILE)			

[illegible]

**Scan for up-to-date
product information.**

RESILIENT COLLECTION *at a glance*

							
	RESOLUTE®	PINNACLE®	DYNAMIC®	STEADFAST®	2062	2037	501
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Hard-Set, Elastomeric Adhesive	Hard-Set, Transitional Pressure Sensitive Adhesive	Firm-Set, Modified Transitional Pressure Sensitive Adhesive	Clear Thin Spread, Vct Adhesive	Solvent-Free, Fiberglass Sheet Seam Sealer	Fiberglass-Backed Sheet Vinyl Pressure Sensitive Adhesive	Solvent-Free Epoxy Flooring Adhesive
BASE CHEMISTRY	Modified Urethane (Isocyanate Free)	Hybrid Acrylic	Hybrid Acrylic	Hybrid Acrylic	Synthetic Latex Blend	Hybrid Acrylic	2-Part Epoxy
CURING METHOD	Moisture Cure	Proprietary Cross-Linking	Proprietary Modified Cross-Linking	Evaporation	Evaporation	Evaporation	Reactive
MOISTURE CONTROL	100% RH	No	No	No	No	No	No
RH	NTR* (100%)	99%	99%	90%	N/A	85%	75%
PH	NTR* (5-14)	5-12	5-12	5-9	N/A	5-9	5-9
MVER	NTR*	12 lbs	12 lbs	8 lbs	N/A	5 lbs	3 lbs
OPEN TIME	0-15 min	20-30 min (Semi-wet)	20-30 min (Semi-wet)	N/A	N/A	N/A	10 min
FLASH TIME	0 min	30-60 min	30-60 min (PSA)	30-60 min	N/A	30-60 min (PSA)	N/A
WORKING TIME	45 min	20-30 min (Semi-Wet); 3 hrs (PSA)	20-30 min (Semi-Wet); 12 hrs (PSA)	24 hrs	5-10 min	12 hrs	45 min
CURE TIME	6 hrs	12 hrs	12 hrs	24 hrs	24 hrs	24 hrs	24 hrs
LIGHT TRAFFIC	3 hrs	0 min (PSA); 12 hrs (Semi-Wet)	0 min (PSA); 12 hrs (Semi-Wet)	0 min	6 hrs	0 min	12 hrs
HEAVY TRAFFIC	4 hrs	24 hrs	24 hrs	24 hrs	6 hrs	48 hrs	24 hrs
ROLLING LOADS	8 hrs	48 hrs	48 hrs	48 hrs	N/A	N/A	24 hrs
SOUND DATA	STC: 66 dB IIC: 68 dB ΔIIC: 18 dB	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 0.1 g/L	< 14 g/L	< 11 g/L	< 3 g/L	< 13 g/L	< 8 g/L	< 0 g/L

*NTR = No Testing Required

RESILIENT COLLECTION *approved installation tools*

PRODUCT	FLOORING TYPE	TOOL	COVERAGE
RESOLUTE®	RESILIENT: <i>Modular</i> (LVP, LVT, SVT, VCT, VET), <i>Sheet</i> (felt-backed, fiberglass, heterogeneous, homogeneous, woven)	MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/32" x 1/32" U Notch	180-250 ft²/gal
	RESILIENT: Linoleum, <i>Modular</i> (rigid core [dryback] woven), <i>Rubber</i> (crumb, sheet tile), <i>Stair Treads</i> (rubber vinyl) CARPET: <i>Modular</i> (hard-backed, soft-backed, walk-off) WOOD: <i>Cork</i> (flooring, cork-backed hard surface, underlayment)	MOISTURE BARRIER & SOUND CONTROL 1/16" x 1/16" x 1/16" Sq Notch	75-125 ft²/gal
	CARPET: Artificial Turf	MOISTURE BARRIER & SOUND CONTROL 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal
PINNACLE®	RESILIENT: <i>Modular</i> (LVP/LVT [non-porous], SVT, VCT, VET), <i>Sheet</i> (heterogeneous/homogeneous/woven [non-porous]) CARPET: <i>Broadloom</i> (6 ft vinyl-backed) WOOD: <i>Cork</i> (cork-backed hard surface, underlayment)	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	RESILIENT: Linoleum, <i>Modular</i> (LVP/LVT [porous], rigid core [dryback], woven) <i>Rubber</i> (crumb, sheet, tile), <i>Sheet</i> (heterogeneous/homogeneous/woven [porous]), <i>Stair Treads</i> (rubber/vinyl) CARPET: <i>Broadloom</i> (6 ft vinyl-backed,) WOOD: <i>Cork</i> (cork-backed hard surface, underlayment)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal
	RESILIENT: <i>Sheet</i> (fiberglass)	BOND ONLY 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
DYNAMIC®	RESILIENT: <i>Modular</i> (LVP/LVT [non-porous], SVT, VCT, VET), <i>Sheet</i> (heterogeneous/homogeneous [non-porous]) CARPET: <i>Modular</i> (hard-backed/soft-backed [non-porous])	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	RESILIENT: Linoleum, <i>Modular</i> (LVP/LVT [porous], rigid core [dryback]) <i>Rubber</i> (crumb, sheet, tile), <i>Sheet</i> (heterogeneous/homogeneous [porous]), <i>Stair Treads</i> (rubber/vinyl [porous]) CARPET: <i>Broadloom</i> (6 ft vinyl-backed, double-stick-cushion-to-substrate) <i>Modular</i> (hard-backed/soft-backed [porous], walk-off) WOOD: <i>Cork</i> (cork-backed hard surface, underlayment)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal
	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed, HP & vinyl-backed, polyurethane, rubber-backed, unitary Action-Bac)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	CARPET: <i>Broadloom</i> (double-stick carpet-to-cushion, unitary, woven-backed)	BOND ONLY 1/8" x 1/8" 1/16" U Notch	50-65 ft²/gal (6-7 yd²/gal)
	RESILIENT: <i>Sheet</i> (fiberglass) CARPET: <i>Modular</i> (hard-backed)	BOND ONLY 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
STEADFAST®	RESILIENT: <i>Modular</i> (VCT [porous])	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal
	RESILIENT: <i>Modular</i> (VCT [non-porous])	BOND ONLY 1/16" x 1/32" 5/64" U Notch	Up to 300 ft²/gal
2062	RESILIENT: Sheet (fiberglass)	Applicator Tip	225 lf/8oz
2037	RESILIENT: Sheet (fiberglass)	BOND ONLY 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
501	RESILIENT: <i>Modular</i> (LVP, LVT, VCT), <i>Sheet</i> (homogeneous, vinyl), <i>Stair Treads</i> (rubber/vinyl)	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	180-250 ft²/gal



For more details, visit
tayloradhesives.com



Scan for up-to-date
product information.



Download on the
App Store



GET IT ON
Google Play

INTRODUCING THE ENTIRE WOOD COLLECTION

Signature Line®

- **RIDGELINE®**
UNLIMITED MOISTURE PROTECTION AND SOUND CONTROL
MODIFIED SILANE ADHESIVE
- **IRONWOOD®**
95% MOISTURE PROTECTION AND SOUND CONTROL
MODIFIED SILANE ADHESIVE
- **ASPEN®**
90% MOISTURE PROTECTION MODIFIED SILANE ADHESIVE
- **IRONWOOD® GLUE ASSIST**
WOOD FLOORING GLUE ASSIST ADHESIVE

Essentials Line

- **ALPINE™**
UNLIMITED MOISTURE PROTECTION URETHANE
ADHESIVE
- **TIMBERLINE™**
90% MOISTURE-CURED URETHANE ADHESIVE
- **REPAIR™**
ENGINEERED WOOD FLOOR REPAIR ADHESIVE/KIT
- **2049**
FLOATING FLOOR TONGUE AND GROOVE ADHESIVE



SIGNATURE LINE®

RIDGELINE®

UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- Unlimited moisture protection (see TDS) • Cost savings potential • No moisture or pH testing required
- Permanent, waterproof bond • Solvent and isocyanate-free • Non-staining and easy to clean • 1-step installation (no stirring/mixing) • High-strength, elastomeric membrane • Rapid occupancy times • Faster construction timeline
- Sound control (IIC, STC) • Warranted over cutback residue (see TDS) • Protects flooring from alkali attack
- Extremely low VOC, extremely low odor • Antimicrobial technology



COVERAGE: 20-70 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year



SIGNATURE LINE®

IRONWOOD®


95% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE

- 95% moisture protection (see TDS) • Permanent, waterproof bond • Solvent and isocyanate-free • Non-staining and easy to clean • 1-step installation (no stirring/mixing) • High-strength, elastomeric membrane • Rapid occupancy times • Sound control (IIC, STC) • Warranted over cutback residue (see TDS) • Protects flooring from alkali attack
- Extremely low VOC, extremely low odor • Antimicrobial technology



COVERAGE: 20-70 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year



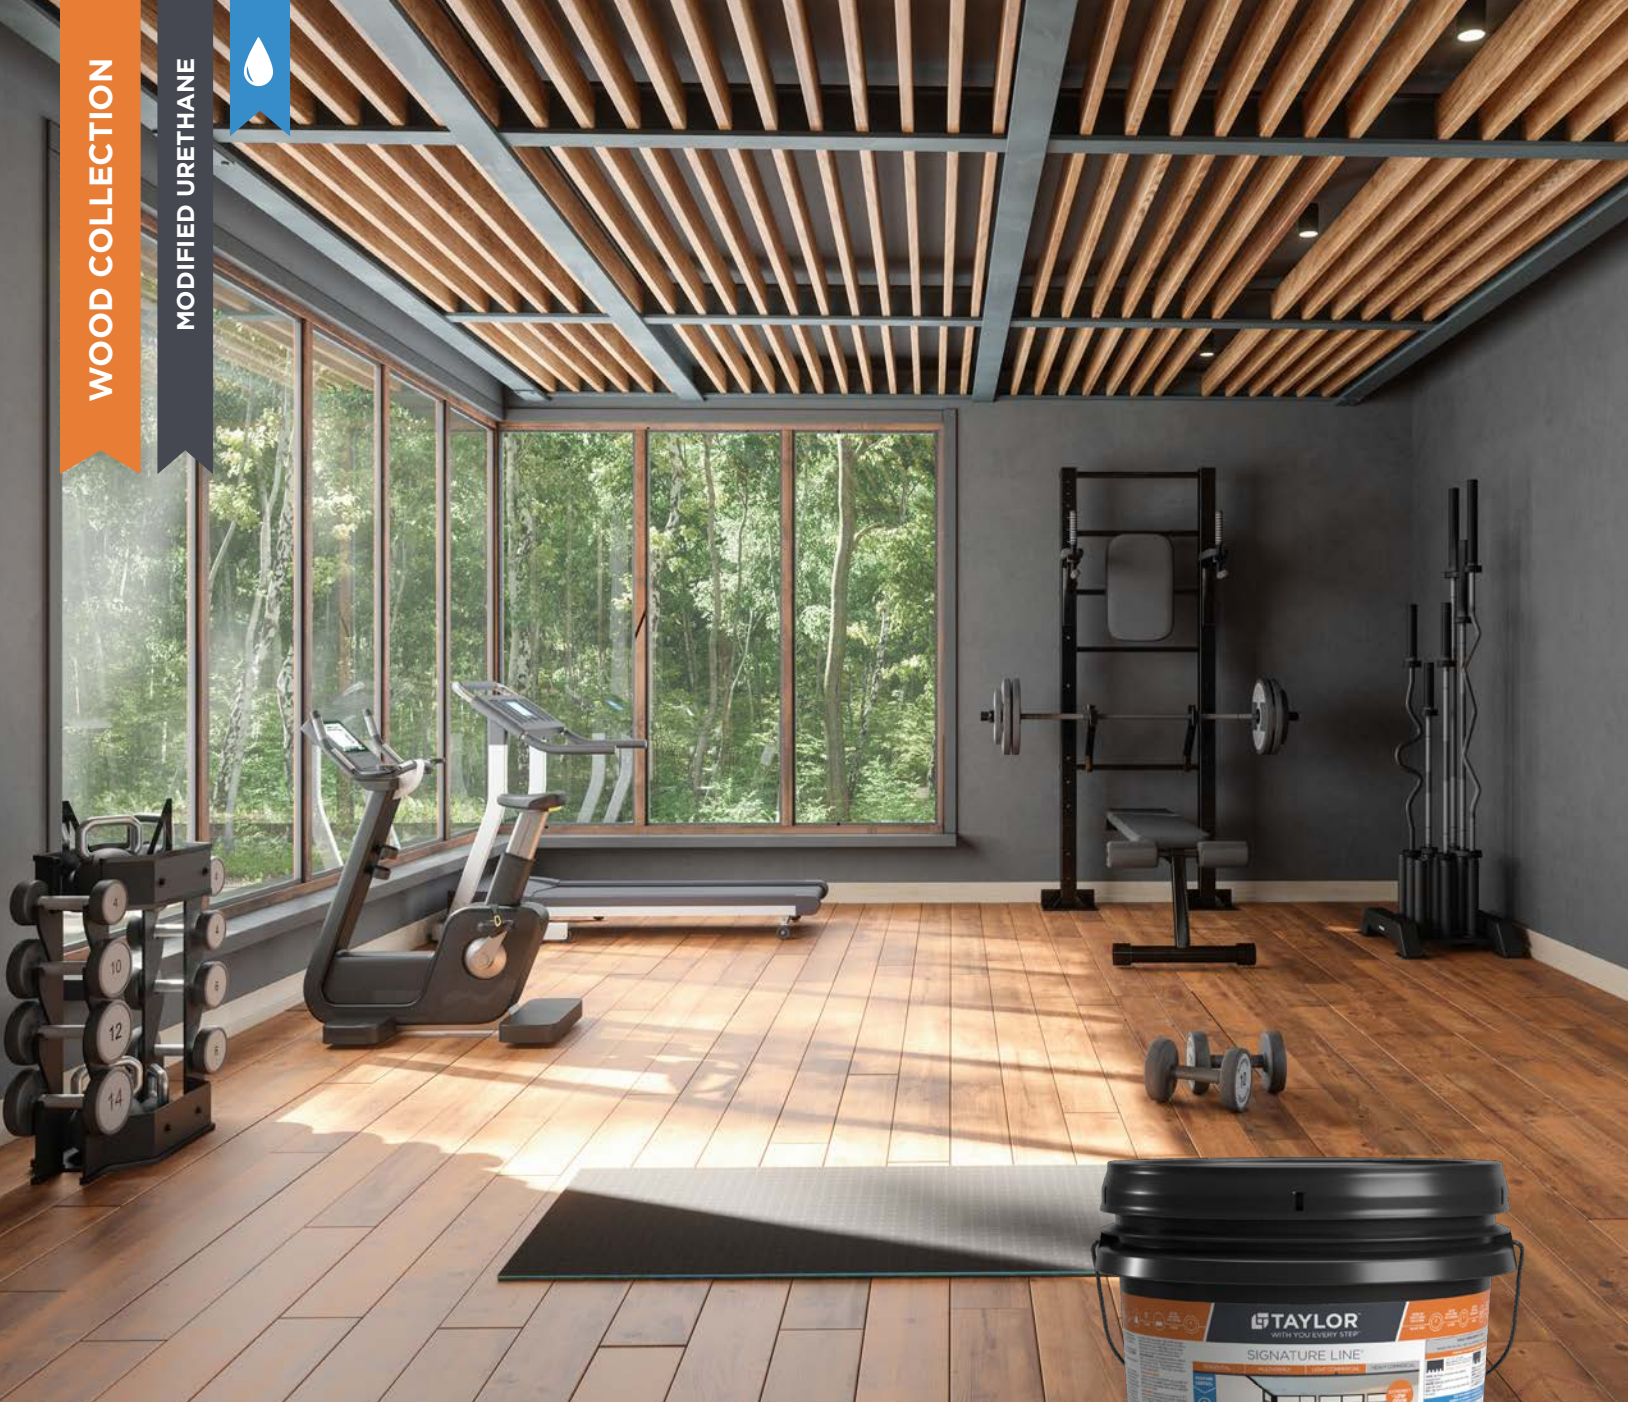


SIGNATURE LINE®

ASPEN®

90% MOISTURE VAPOR BARRIER, ELASTOMERIC ADHESIVE


- 90% moisture protection (see TDS) • Attractive price point • Permanent, waterproof bond • Solvent and isocyanate-free • Non-staining and easy to clean • 1-part installation (no stirring/mixing) • Rapid occupancy times • High-strength, elastomeric membrane • Warranted over cutback residue (see TDS) • Protects flooring from alkali attack • Extremely low VOC, extremely low odor • Antimicrobial technology



COVERAGE: 20-70 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year




*NTR = No Testing Required

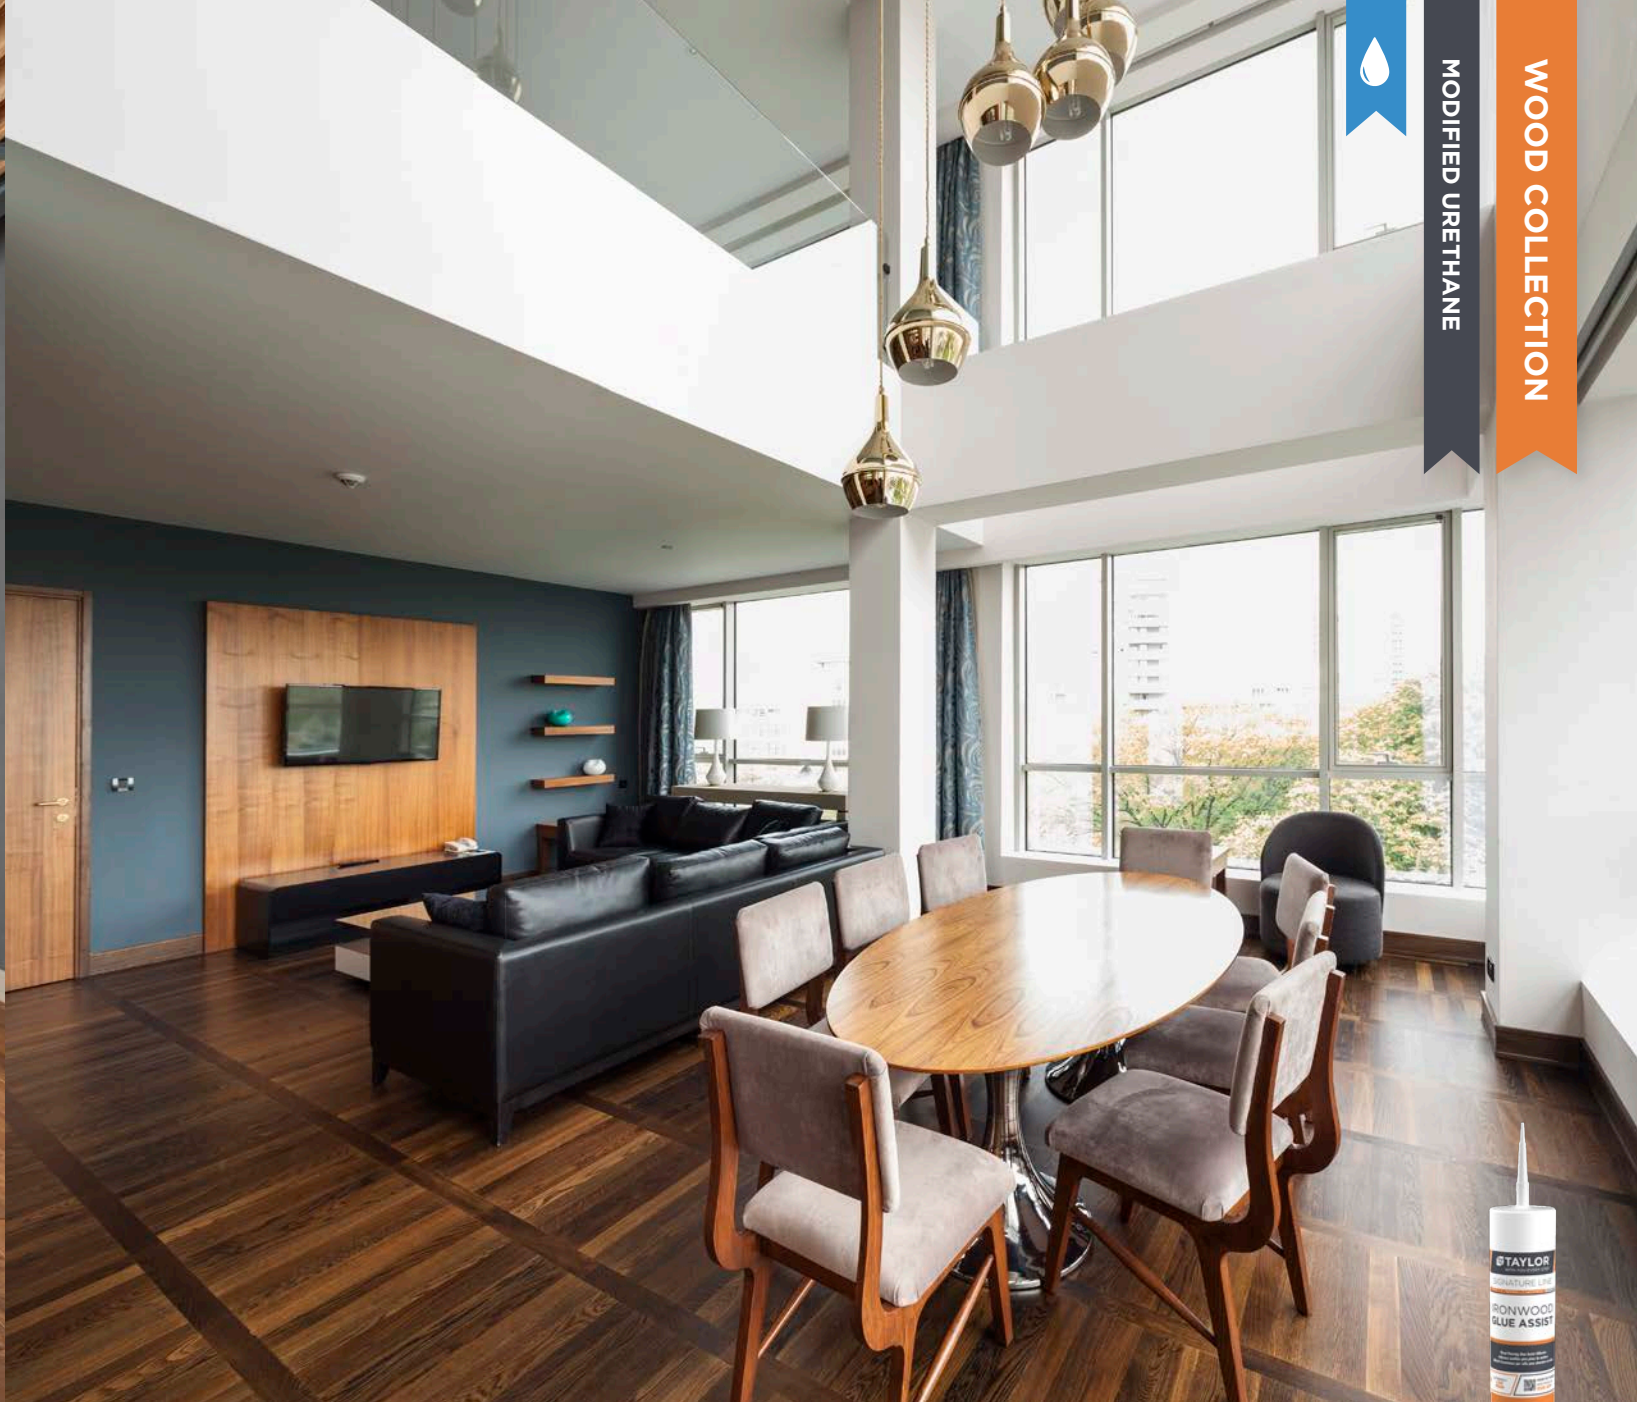

SIGNATURE LINE®

IRONWOOD®
GLUE ASSIST**WOOD FLOORING, GLUE ASSIST ADHESIVE**

- Reduces friction squeaks common with nail/staple-down installations • Wet-set, early grab, fast-curing formula • Solvent and isocyanate-free • Non-staining and easy to clean • Rapid occupancy times • High-strength, waterproof, elastomeric bond • Warranted over cutback residue (see TDS) • Extremely low VOC, extremely low odor • LEED v4 contributing (CDPH v1.2) • Antimicrobial technology



COVERAGE: Dependant upon user
AVAILABLE IN: 20 and 28 oz
SHELF LIFE: 1 year





ESSENTIALS LINE

ALPINE™

UNLIMITED MOISTURE VAPOR BARRIER, URETHANE ADHESIVE

- Unlimited moisture protection (see TDS) • Cost savings potential • No moisture or pH testing required
- Protects flooring from alkali attack • Aggressive tack, fast-grab • High-strength, elastomeric bond • Permanent, waterproof bond • Faster construction timeline • Sound control (IIC, STC) • Non-slump formula • Easy application
- 1-step installation (no stirring/mixing) • Low VOC, low odor



COVERAGE: 20-50 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year



*No Testing Required

**Sound ratings based on 6" concrete slab with ceiling




ESSENTIALS LINE

TIMBERLINE™

90% MOISTURE VAPOR BARRIER, URETHANE ADHESIVE

- 90% moisture protection (see TDS) • Attractive price point • Permanent, waterproof bond • Protects flooring from alkali attack • Aggressive tack, fast-grab • High-strength, elastomeric bond • Non-slump formula • Easy application
- No stirring/mixing required • Low VOC, low odor



COVERAGE: 20-180 ft²/gal
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year



ESSENTIALS LINE

2049

FLOATING FLOOR TONGUE AND GROOVE ADHESIVE

- ANSI Type II water-resistance
- Permanent, water-resistant bond
- Non-staining, easy-to-clean
- Solvent and isocyanate-free
- Zero VOC, extremely low odor
- Attractive price point
- Easy application
- Antimicrobial technology

OPEN TIME **0 MIN** WORKING TIME **5-10 MIN** CURE TIME **12 HRS** EXTREMELY **LOW ODOR**

LIGHT TRAFFIC **24 HRS** HEAVY TRAFFIC **24 HRS**



COVERAGE: 400 lf/16oz
AVAILABLE IN: 16 oz
SHELF LIFE: 2 years

WOOD COLLECTION
POLY-VINYL ACETATE EMULSION



WOOD COLLECTION
HYBRID ACRYLIC

ESSENTIALS LINE

REPAIR™

WOOD REPAIR ADHESIVE

- Repair Hollow Spots

- Kit Contents:**
- Bottle of REPAIR (1 quart)
 - 60cc Plastic Syringe
 - Metal Applicator Tips
 - Drill Bits
 - Dowels
 - Dowel Punch



CURE TIME **24 HRS** LIGHT TRAFFIC **24 HRS** HEAVY TRAFFIC **24 HRS**



COVERAGE: Dependant upon user
AVAILABLE IN: 1 qt
SHELF LIFE: 1 year

You asked, ***we answered!***

TIMBERLINE™ now offers **MOISTURE PROTECTION**



TRY IT TODAY

Urethane Wood Flooring Adhesive



WOOD COLLECTION *approved flooring types*






NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.

FLOORING TYPE		RIDGELINE®	IRONWOOD®	ASPEN®	IRONWOOD® GLUE ASSIST
WOOD	ACRYLIC INFUSED PLANK				
	BAMBOO (STRAND WOVEN)				
	BAMBOO (NOT STRAND WOVEN)				
	CORK (FLOORING)				
	CORK (CORK-BACKED HARD SURFACE)				
	CORK (UNDERLAYMENT)				
	HARDWOOD (ENGINEERED, PARQUET)				
	HARDWOOD (SOLID)				
RESILIENT	LINOLEUM				
	MODULAR (LVP, LVT)				
	MODULAR (RIGID CORE - DRYBACK)				
	MODULAR (SVT, VET)				
	MODULAR (VCT)				
	MODULAR (WOVEN)				
	RUBBER (CRUMB)				
	RUBBER (SHEET & TILE)				
	SHEET (FELT-BACKED)				
	SHEET (FIBERGLASS)				
	SHEET (HETEROGENEOUS)				
	SHEET (HOMOGENEOUS)				
	SHEET (WOVEN)				
	STAIR TREADS (RUBBER, VINYL)				
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)				
	BROADLOOM (6-FT VINYL-BACKED)				
	BROADLOOM (ACTION-BAC, JUTE-BACK)				
	BROADLOOM (CARPET PAD)				
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)				
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)				
	BROADLOOM (HOT-MELTED-BACKED)				
	BROADLOOM (HP & VINYL-BACKED)				
	BROADLOOM (NON-VINYL-BACKED PATTERNED)				
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)				
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)				
	BROADLOOM (WOVEN-BACKED)				
	MODULAR (HARD-BACKED CARPET TILE)				
	MODULAR (SOFT-BACKED CARPET TILE)				
	MODULAR (WALK-OFF CARPET TILE)				

[illegible]

Scan for up-to-date
product information.

WOOD COLLECTION *at a glance*

<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div><div>RIDGELINE®</div><div>IRONWOOD®</div><div>ASPEN®</div><div>IRONWOOD® GLUE ASSIST</div><div>ALPINE™</div><div>TIMBERLINE™</div><div>2049</div><div>REPAIR™</div></div>								
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Elastomeric Adhesive	95% Moisture Vapor Barrier, Elastomeric Adhesive	90% Moisture Vapor Barrier, Elastomeric Adhesive	Wood Flooring, Glue Assist Adhesive	Unlimited Moisture Vapor Barrier, Urethane Adhesive	90% Moisture Vapor Barrier, Urethane Adhesive	Floating Floor Tongue And Groove Glue	Wood Repair Adhesive
BASE CHEMISTRY	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)	Modified Urethane (Isocyanate Free)	Urethane	Urethane	Poly-vinyl Acetate Emulsion	Hybrid Acrylic
CURING METHOD	Moisture Cure	Moisture Cure	Moisture Cure	Moisture Cure	Moisture Cured	Moisture Cured	Evaporation	Evaporation
MOISTURE CONTROL	100% RH	95% RH	90% RH	No	100% RH	90% RH	No	No
RH	NTR* (100%)	95%	90%	N/A	NTR* (100%)	90%	N/A	N/A
PH	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A	NTR* (5-14)	5-9	N/A	N/A
MVER	NTR*	15 lbs	10 lbs	N/A	NTR*	10 lbs	N/A	N/A
OPEN TIME	0 min	0 min	0 min	0 min	10 min	10 min	0 min	N/A
FLASH TIME	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
WORKING TIME	45 min	45 min	45-60 min	45 min	45-60 min	45-60 min	5-10 min	N/A
CURE TIME	12 hrs	12 hrs	12 hrs	12 hrs	24 hrs	24 hrs	12 hrs	24 hrs
LIGHT TRAFFIC	6 hrs	6 hrs	6 hrs	6 hrs	24 hrs	24 hrs	24 hrs	24 hrs
HEAVY TRAFFIC	6 hrs	6 hrs	6 hrs	6 hrs	24 hrs	24 hrs	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	STC: 62 dB IIC: 68 dB	STC: 61 dB IIC: 66 dB	N/A	N/A	STC: 62 dB IIC: 63 dB	N/A	N/A	N/A
VOCS	< 0.1 g/L	< 0.1 g/L	< 0.1 g/L	< 0.1 g/L	< 25 g/L	< 10 g/L	0 g/L	< 25 g/L

WOOD COLLECTION *approved installation tools*

PRODUCT	FLOORING TYPE	TOOL	COVERAGE
RIDGELINE®	WOOD: <i>Cork</i> (flooring, cork-backed hard-surface, underlayment), <i>Hardwood</i> (parquet)	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid) RESILIENT: <i>Rubber</i> (crumb)	BOND ONLY 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft²/gal
	WOOD: Planks greater than 6' long and 5" wide	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks less than 6' long and 5" wide])	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	25-30 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks greater than 6' long and 5" wide])	MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	Up to 20 ft²/gal
IRONWOOD®	WOOD: <i>Cork</i> (flooring, cork-backed hard-surface, underlayment), <i>Hardwood</i> (parquet)	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid) RESILIENT: <i>Rubber</i> (crumb)	BOND ONLY 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft²/gal
	WOOD: Planks greater than 6' long and 5" wide	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks less than 6' long and 5" wide"])	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	25-30 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks greater than 6' long and 5" wide"])	MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	Up to 20 ft²/gal
ASPEN®	WOOD: <i>Cork</i> (flooring, cork-backed hard-surface, underlayment), <i>Hardwood</i> (parquet)	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid) RESILIENT: <i>Rubber</i> (crumb)	BOND ONLY 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft²/gal
	WOOD: Planks greater than 6' long and 5" wide	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks less than 6' long and 5" wide"])	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	25-30 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, solid [planks greater than 6' long and 5" wide"])	MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	Up to 20 ft²/gal
IRONWOOD® GLUE ASSIST	WOOD: Acrylic Infused Plank, Bamboo, <i>Hardwood</i> (engineered, parquet, solid)	BOND ONLY Tip Applicator Included	Dependent upon user
ALPINE™	WOOD: Wood flooring up to 5/8" thick, <i>Cork</i> (flooring, cork-backed hard surface, underlayment)	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	30-35 ft²/gal
	Wood flooring greater than 5/8" thick, multi-ply engineered plank	MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	20 ft²/gal
	Wood flooring up to 1/2" thick	BOND ONLY 3/16" x 5/32" V Notch	50 ft²/gal
	Wood flooring up to 3/4" thick	BOND ONLY 1/4" x 1/4" 1/4" Sq Notch	30 ft²/gal
	WOOD: Planks greater than 6' long and 5" wide	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft²/gal
TIMBERLINE™	WOOD: <i>Cork</i> (underlayment), RESILIENT: <i>Rubber</i> (crumb)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal
	WOOD: <i>Cork</i> (flooring, underlayment), <i>Hardwood</i> (parquet) RESILIENT: <i>Rubber</i> (crumb)	BOND ONLY 1/8" x 1/8" x 1/8" Sq Notch	60-70 ft²/gal
	WOOD: Acrylic Infused Plank, Bamboo (not strand woven), <i>Cork</i> (flooring, cork-backed hard surface, underlayment), <i>Hardwood</i> (engineered, parquet, solid)	BOND ONLY 3/16" x 1/4" x 5/16" V Notch	Up to 50 ft²/gal
	WOOD: Planks greater than 6' long and 5" wide	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	30-35 ft²/gal
	WOOD: Wood flooring up to 5/8" thick, <i>Cork</i> (flooring, cork-backed hard surface, underlayment)	MOISTURE BARRIER & SOUND CONTROL 1/4" x 1/4" V Notch	30-35 ft²/gal
2049	Wood flooring greater than 5/8" thick, multi-ply engineered plank	MOISTURE BARRIER & SOUND CONTROL 1/2" x 15/32" V Notch	20 ft²/gal
	WOOD: Acrylic Infused Plank, <i>Hardwood</i> (engineered, parquet)	BOND ONLY Applicator tip	400 lf/16oz
REPAIR™	WOOD: <i>Hardwood</i> (engineered only)	BOND ONLY Syringe/kit	Dependant upon user



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play

INTRODUCING THE ENTIRE CARPET COLLECTION

Signature Line®

- **AGILE®**
HARD-SET MULTI-PURPOSE ADHESIVE
- **VERSATILE®**
SOFT-SET, FULLY REPOSITIONABLE PSA

Essentials Line

- **900**
GENERAL PURPOSE LATEX ADHESIVE
- **722**
WATER-BASED PAD ADHESIVE
- **710**
MULTI-PURPOSE LATEX ADHESIVE
- **EDGE-LOCK**
CARPET EDGE SEALING ADHESIVE

Additional Products

- **720/720-C**
PAD CEMENT
- **775/775-C**
CARPET SEAM CEMENT
- **2055**
FAST-TACK CARPET ADHESIVE
- **2070**
PREMIUM MULTI-PURPOSE ADHESIVE
- **2089**
OUTDOOR CARPET ADHESIVE
- **757**
ALL WEATHER EXTERIOR CARPET ADHESIVE





SIGNATURE LINE®

AGILE®

HARD-SET, MULTI-PURPOSE ADHESIVE

- Early leg development • Aggressive tack, fast-grab formula • High-strength, elastomeric bond • Up to 2 hours working time • Rapid occupancy • Permanent, water-resistant bond • Attractive price point • Installs multiple flooring types • Simple installation • Solvent and isocyanate-free • Low VOC, extremely low odor • Antimicrobial technology

RH 90%	PH 5-9	MVER 8 LBS	OPEN TIME 15-60 MIN* (see page 42)	WORKING TIME 15-120 MIN* (see page 42)	CURE TIME 12 HRS
LIGHT TRAFFIC 12 HRS* (see page 42)	HEAVY TRAFFIC 24 HRS* (see page 42)	EXTREMELY LOW ODOR			

COVERAGE: 50-180 ft²/gal (5-20 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



*Data reference direct glue-down usage only



SIGNATURE LINE®

VERSATILE®

SOFT-SET, FULLY REPOSITIONABLE PRESSURE SENSITIVE® ADHESIVE

- Repositionable for entire life cycle • Aggressive tack, fast grab • High moisture tolerance • Elastomeric, water-resistant bond • Immediate access for light traffic • 24 hours of working time • Attractive price point • Installs multiple flooring types • ColorReady® technology • Simple installation • Plasticizer migration resistance • Solvent and isocyanate-free • Non-staining and easy-to-clean • Low VOC, extremely low odor • Antimicrobial technology

RH 95%	PH 5-10	MVER 10 LBS	FLASH TIME 30-60 MIN	WORKING TIME 24 HRS	CURE TIME 24 HRS
LIGHT TRAFFIC 0 MIN	HEAVY TRAFFIC 24 HRS	EXTREMELY LOW ODOR			

COVERAGE: 150-350 ft²/gal (16-39 yd²/gal)
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years



CARPET COLLECTION

SYNTHETIC LATEX BLEND



ESSENTIALS LINE

900

GENERAL PURPOSE
LATEX ADHESIVE

COVERAGE: 90-180 ft²/gal (10-20 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



CARPET COLLECTION

SYNTHETIC LATEX BLEND



ESSENTIALS LINE

722


WATER-BASED
PAD ADHESIVE

COVERAGE: Up to 1000 lf/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 2 years



CARPET COLLECTION

SYNTHETIC RUBBER, RESIN BLEND

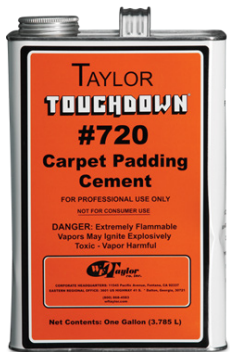

ADDITIONAL ITEMS

720/720-C

SOLVENT-BASED
PAD CEMENT

COVERAGE: Up to 1000 lf/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 1 year



CARPET COLLECTION

SYNTHETIC RUBBER, RESIN BLEND



ADDITIONAL ITEMS

775/775-C

NATURAL CARPET
SEAM CEMENT

COVERAGE: Up to 75 lf/8oz
AVAILABLE IN: 1 qt
SHELF LIFE: 1 year



CARPET COLLECTION

LATEX ADHESIVE



ESSENTIALS LINE

710

MULTI-PURPOSE
LATEX ADHESIVE

COVERAGE: Up to 1200 lf/gal
AVAILABLE IN: 1 qt and 1 gal
SHELF LIFE: 6 months



CARPET COLLECTION

SYNTHETIC LATEX BLEND



ESSENTIALS LINE

EDGE-LOCK

CARPET EDGE
SEALING ADHESIVE

COVERAGE: Up to 75 lf/8oz
AVAILABLE IN: 8 oz
SHELF LIFE: 6 months



CARPET COLLECTION

SYNTHETIC LATEX BLEND

2055
PERFORMANCE PLUS
FAST-TACK CARPET
ADHESIVE

COVERAGE: 50-180 ft²/gal (5-20 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

SYNTHETIC LATEX BLEND

2070
POWER-TAC CONTRACT
GRADE ADHESIVE

COVERAGE: 90-180 ft²/gal (10-20 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

ACRYLIC LATEX BLEND

2089

TUFF-LOK X-LINK
OUTDOOR CARPET
ADHESIVE

COVERAGE: 50-120 ft²/gal (5-14 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years



ADDITIONAL ITEMS

CARPET COLLECTION

SYNTHETIC RUBBER, RESIN BLEND

757
ALL WEATHER EXTERIOR
CARPET ADHESIVE

COVERAGE: 50-120 ft²/gal (5-14 yd²/gal)
AVAILABLE IN: 4 gal
SHELF LIFE: 1 year



ADDITIONAL ITEMS

CARPET COLLECTION *approved flooring types*







NOTE: Our moisture and specialty products are not restricted by flooring types, so they do not appear in the chart below.







FLOORING TYPE		AGILE®	VERSATILE®	900	722
CARPET	ARTIFICIAL TURF (SEE EACH PRODUCT'S TDS)				
	BROADLOOM (6-FT VINYL-BACKED)				
	BROADLOOM (ACTION-BAC, JUTE-BACK)				
	BROADLOOM (CARPET PAD)				
	BROADLOOM (DOUBLE STICK - CARPET TO CUSHION)				
	BROADLOOM (DOUBLE STICK - CUSHION TO SUBSTRATE)				
	BROADLOOM (HOT-MELTED-BACKED)				
	BROADLOOM (HP & VINYL-BACKED)				
	BROADLOOM (NON-VINYL-BACKED PATTERNED)				
	BROADLOOM (POLYURETHANE, RUBBER-BACKED)				
	BROADLOOM (UNITARY & UNITARY ACTION-BAC)				
	BROADLOOM (WOVEN-BACKED)				
	MODULAR (HARD-BACKED CARPET TILE)				
	MODULAR (SOFT-BACKED CARPET TILE)				
	MODULAR (WALK-OFF CARPET TILE)				
RESILIENT	LINOLEUM				
	MODULAR (LVP, LVT)				
	MODULAR (RIGID CORE - DRYBACK)				
	MODULAR (SVT, VET)				
	MODULAR (VCT)				
	MODULAR (WOVEN)				
	RUBBER (CRUMB)				
	RUBBER (SHEET & TILE)				
	SHEET (FELT-BACKED)				
	SHEET (FIBERGLASS)				
	SHEET (HETEROGENEOUS)				
	SHEET (HOMOGENEOUS)				
	SHEET (WOVEN)				
	STAIR TREADS (RUBBER, VINYL)				
	WOOD	ACRYLIC INFUSED PLANK			
BAMBOO (STRAND WOVEN)					
BAMBOO (NOT STRAND WOVEN)					
CORK (FLOORING)					
CORK (CORK-BACKED HARD SURFACE)					
CORK (UNDERLAYMENT)					
HARDWOOD (ENGINEERED, PARQUET)					
HARDWOOD (SOLID)					

[illegible]

**Scan for up-to-date
product information.**

CARPET COLLECTION *at a glance*

						
	AGILE®	VERSATILE®	900	722	710	EDGE-LOCK
PRODUCT TAGLINE	Hard-Set, Multi-Purpose Adhesive	Soft-Set, Fully-Repositionable Pressure Sensitive Adhesive	General Purpose Latex Adhesive	Water-Based Pad Adhesive	Multi-Purpose Latex Adhesive	Carpet Edge Sealing Adhesive
BASE CHEMISTRY	Synthetic Latex & Hydrocarbon Resin Blend	Hybrid Acrylic	Synthetic Latex & Hydrocarbon Resin Blend	Synthetic Latex & Hydrocarbon Resin Blend	Latex Adhesive	Synthetic Latex Blend
CURING METHOD	Evaporation	Evaporation	Evaporation	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	No	No	No	No	No	No
RH	90%	95%	75%	75%	N/A	N/A
PH	5-9	5-10	5-9	5-9	N/A	N/A
MVER	8 lbs	10 lbs	5 lbs	3 lbs	N/A	N/A
OPEN TIME	15-60 min (direct glue down); 30-60 min (underlayment/ double stick cushion to carpet)	N/A	20-30 min	0 min	N/A	N/A
FLASH TIME	N/A	30-60 min	N/A	N/A	N/A	N/A
WORKING TIME	15-120 min (direct glue down); 30-120 min (underlayment/ double stick cushion to carpet)	24 hrs	15-120 min	45-60 min	15-30 min	5-10 min
CURE TIME	12 hrs	24 hrs	48 hrs	12 hrs	24 hrs	12 hrs
LIGHT TRAFFIC	12 hrs (direct glue down/ underlayment); 24 hrs (double-stick)	0 min	12 hrs	N/A	24 hrs	24 hrs
HEAVY TRAFFIC	24 hrs (direct glue down/ underlayment); 48 hrs (double-stick)	24 hrs	24 hrs	N/A	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 12 g/L	< 11 g/L	< 13 g/L	< 27 g/L	< 46 g/L	< 10 g/L

						
	2070	2055	2089	720/720-C	757	775/775-C
PRODUCT TAGLINE	Power-tac™ contract grade adhesive	Performance Plus Fast-Tack Carpet Adhesive	Tuff-Lok X-Link™ Outdoor carpet adhesive	Solvent-Based Carpet Pad Cement	All-weather exterior carpet adhesive	Natural Carpet Seam Cement
BASE CHEMISTRY	Synthetic Latex & Hydrocarbon Resin Blend	Synthetic Latex & Hydrocarbon Resin Blend	Acrylic Latex Blend	Synthetic Rubber, Resin Blend	Synthetic Rubber, Resin Blend	Synthetic Rubber, Resin Blend
CURING METHOD	Evaporation	Evaporation	Proprietary Cross-Linking	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	No	No	No	No	No	No
RH	75%	90%	N/A	N/A	N/A	N/A
PH	5-9	5-9	5-9	N/A	5-9	N/A
MVER	5 lbs	8 lbs	N/A	N/A	N/A	N/A
OPEN TIME	20-30 min	15-60 min (direct glue down); 30-60 min (underlayment/ double stick cushion to carpet)	15-60 min (direct glue down); 30-60 min (underlayment/ double stick cushion to carpet)	0 min	0 min	N/A
FLASH TIME	N/A	N/A	N/A	N/A	N/A	5-10 min
WORKING TIME	15-120 min	15-120 min (direct glue down); 30-120 min (underlayment/ double stick cushion to carpet)	15-120 min (direct glue down); 30-120 min (underlayment/ double stick cushion to carpet)	10 min	15-45 min	5-10 min
CURE TIME	48 hrs	12 hrs	12 hrs	N/A	24 hrs	12 hrs
LIGHT TRAFFIC	12 hrs	12 hrs (direct glue down/ underlayment); 24 hrs (double-stick)	12 hrs (direct glue down/ underlayment); 24 hrs (double-stick)	0 min	6 hrs	24 hrs
HEAVY TRAFFIC	24 hrs	24 hrs (direct glue down/ underlayment); 48 hrs (double-stick)	24 hrs (direct glue down/ underlayment); 48 hrs (double-stick)	N/A	24 hrs	24 hrs
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 13 g/L	< 12 g/L	< 11 g/L	720 = 367 g/L 720-C = 0 g/L	301 g/L	775 = 629 g/L 775-C = 0 g/L

CARPET COLLECTION *approved installation tools*

PRODUCT	FLOORING TYPE	TOOL	COVERAGE
AGILE®	CARPET: <i>Broadloom</i> (double-stick cushion-to-substrate, polyurethane, rubber-backed) WOOD: <i>Cork</i> (cork-backed hard surface)	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	CARPET: <i>Broadloom</i> (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	BOND ONLY 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal (5-7 yd²/gal)
	RESILIENT: Linoleum, <i>Sheet</i> (felt-backed) WOOD: <i>Cork</i> (underlayment)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal (16-20 yd²/gal)
VERSATILE®	CARPET: <i>Broadloom</i> (6 ft vinyl-backed, HP & vinyl-backed) RESILIENT: <i>Modular</i> (LVP, LVT, VCT, [non-porous])	BOND ONLY 1/16" x 1/32" x 1/32" U Notch	220-260 ft²/gal (24-29 yd²/gal)
	CARPET: <i>Broadloom</i> (double-stick cushion-to-substrate) <i>Modular</i> (hard-backed, soft-backed) RESILIENT: <i>Modular</i> (LVP, LVT, VCT, [porous]) WOOD: <i>Cork</i> (underlayment)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal (16-20 yd²/gal)
	RESILIENT: <i>Sheet</i> (fiberglass) CARPET: <i>Broadloom</i> (6 ft vinyl-backed, HP & vinyl-backed) <i>Modular</i> (hard-backed)	BOND ONLY 3/8" Short Nap Paint Roller	Up to 350 ft²/gal (up to 39 yd²/gal)
900	CARPET: <i>Broadloom</i> (Action-Bac, jute-back)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	RESILIENT: <i>Sheet</i> (felt-backed [porous])	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal (16-20 yd²/gal)
722	CARPET: <i>Broadloom</i> (carpet pad) NOTE: <i>For stretch-in applications only.</i>	BOND ONLY Tip Applicator Included	Up to 1000 lf/gal
710	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	BOND ONLY Tip Applicator Included	Up to 1200 lf/gal
EDGE-LOCK	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, polyurethane & rubber-backed, unitary & unitary Action-Bac, woven-backed)	BOND ONLY Tip Applicator Included	Up to 75 lf/8oz
2070	CARPET: <i>Broadloom</i> (Action-Bac, hot-melt-backed, polyurethane & rubber-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	RESILIENT: <i>Sheet</i> (felt-backed)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal (16-20 yd²/gal)
2055	CARPET: <i>Broadloom</i> (double-stick cushion-to-substrate, polyurethane, rubber-backed) WOOD: <i>Cork</i> (cork-backed hard surface)	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	CARPET: <i>Broadloom</i> (double-stick carpet-to-cushion, non-vinyl-backed patterned, unitary & unitary Action-Bac, woven-backed)	BOND ONLY 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal (5-7 yd²/gal)
	RESILIENT: Linoleum, <i>Sheet</i> (felt-backed) WOOD: <i>Cork</i> (underlayment)	BOND ONLY 1/16" x 1/16" x 1/16" Sq Notch	150-180 ft²/gal (16-20 yd²/gal)
2089	OUTDOOR CARPET: <i>Broadloom</i> (Action-Bac, needle-bond, smooth-backed, rubber-backed, urethane foam-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	OUTDOOR CARPET: <i>Broadloom</i> (Latex unitary, rough-backed)	BOND ONLY 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal (5-7 yd²/gal)
720/720-C	CARPET: <i>Broadloom</i> (carpet pad) NOTE: <i>For stretch-in applications only.</i>	BOND ONLY Applicator Bottle	Up to 1000 lf/gal
757	OUTDOOR CARPET: <i>Broadloom</i> (Action-Bac, needle-bond, smooth-backed, rubber-backed)	BOND ONLY 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal (10-14 yd²/gal)
	OUTDOOR CARPET: <i>Broadloom</i> (Latex unitary, rough-backed)	BOND ONLY 1/8" x 1/8" x 1/16" U Notch	50-65 ft²/gal (5-7 yd²/gal)
775/775-C	CARPET: <i>Broadloom</i> (Action-Bac, jute-back, hot-melt-backed, non-vinyl-backed patterned, rubber-backed, unitary & unitary Action-Bac, woven-backed)	BOND ONLY Applicator Bottle	Up to 75 lf/8oz



For more details, visit
tayloradhesives.com



Scan for up-to-date
product information.



Download on the
App Store



GET IT ON
Google Play



SCAN TO
LEARN MORE

#yourvitalaccessory

INVEST YOUR TIME
with our amazing resources!

TAYLOR TIME

NEWS

TAYLOR TIME

TIPS

TAYLOR TIME

LIVE

TAYLOR TIME

PARTNER EXCLUSIVE

TAYLOR TIME

TECH

INTRODUCING THE ENTIRE MOISTURE + SPECIALTY COLLECTIONS

Signature Line®

- **SAHARA®**
UNLIMITED MOISTURE VAPOR BARRIER,
ELASTOMERIC MEMBRANE
- **ZEPHYR®**
95% MOISTURE VAPOR BARRIER, OR ENCAPSULATOR, OR
PRIMER COATING
- **ENHANCE®**
SURFACE BOND PROMOTER AND ENCAPSULATOR
- **FINALE®**
HARD-SET, ELASTOMERIC COVE BASE ADHESIVE
- **ELEVATE®**
ROLLER APPLIED WALL ADHESIVE FOR VINYL PLANK/TILE
- **GRAVITY®**
ANTI-SKID SUBSTRATE COATING FOR FLOATING FLOOR
INSTALLATION

Essentials Line

- **2025**
UNIVERSAL LATEX PRIMER COATING

Additional Products

- **901**
ODYSSEY TYPE 1 PREMIUM CERAMIC TILE ADHESIVE
- **1N/1N-C**
CONTACT CEMENT - BRUSH GRADE
- **725**
ALL PURPOSE SPRAY ADHESIVE
- **ODORGHOST MULTI-SURFACE + UV**
BIO-ENZYMATIC ORGANIC-BASED ODOR
ELIMINATOR WITH BLACKLIGHT TRACER
- **ODORGHOST MULTI-SURFACE**
BIO-ENZYMATIC ORGANIC-BASED ODOR
ELIMINATOR





SIGNATURE LINE®

SAHARA®

UNLIMITED MOISTURE VAPOR BARRIER, ELASTOMERIC MEMBRANE

- Protects floating and loose-lay flooring • Unlimited moisture protection (see TDS) • Replaces 2-part epoxies
- Cost savings potential • No testing required (RH, pH, MVER) • No shot/bead-blasting required (CSP 1+) • Protects flooring from alkali attack • Permanent, waterproof membrane • Simple, 1-part installation • Inhibits mold/mildew growth • Faster construction timeline • Self-healing, elastomeric membrane • Handles extreme heavy rolling loads
- Solvent and isocyanate-free • 1-step installation (no stirring/mixing) • Extremely low VOC, extremely low odor
- Antimicrobial technology

RH NTR* 100% PH NTR* 5-14 MVER NTR* CURE TIME 8 HRS EXTREMELY LOW ODOR



COVERAGE: 90-120 ft²/gal
AVAILABLE IN: 2 gal
SHELF LIFE: 1 year

*NTR = No Testing Required



SIGNATURE LINE®

ZEPHYR®

95% MOISTURE VAPOR BARRIER, OR ENCAPSULATOR, OR PRIMER COATING

- Protects floating and loose-lay flooring • 93-95% moisture protection (see TDS) • Inhibits mold/mildew growth
- Encapsulates cutback residue • Fast-drying formula • Detackifies existing adhesive residue • Primes porous substrates • Protects flooring from alkali attack • Attractive price point • 1-step installation (no stirring/mixing)
- Fast roller application • Solvent and isocyanate-free • Zero VOC, extremely low odor • Antimicrobial technology

RH 93-95%** PH NTR* 5-14 MVER 10-15 LBS** CURE TIME 1 HRS EXTREMELY LOW ODOR



COVERAGE: 350 ft²/gal (1 coat), 200 ft²/gal (2 coats)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years

*NTR = No Testing Required | **Based on 1- or 2-coat application – see technical data sheet for complete details.
NOTE 1: Moisture control only available over clean porous concrete per ASTM F710.



SIGNATURE LINE®

ENHANCE®

SURFACE BOND PROMOTER AND ENCAPSULATOR

- Highly-bond-able, textured membrane • Primes difficult-to-bond substrates • Protects flooring from alkali attack
- Encapsulates cutback residue • Detackifies existing adhesive residue • Seals porous substrates • Simple, 1-part installation (roller applied) • Rapid 1-2 hour cure time • Primes TAYLOR Sahara® for glue-down applications
- Extremely low VOC, extremely low odor • Solvent and isocyanate-free • Antimicrobial technology



RH 90% PH NTR* 5-14 MVER 8 LBS CURE TIME 1-2 HRS EXTREMELY LOW ODOR



COVERAGE: Up to 250 ft²/gal
AVAILABLE IN: 2 gal
SHELF LIFE: 1 year

*NTR = No Testing Required



SIGNATURE LINE®

FINALE®

HARD-SET, ELASTOMERIC COVE BASE ADHESIVE

- Cures off-white • Non-staining and easy-to-clean • Strong plasticizer migration resistance • High-strength, water-resistant bond • Permanent, elastomeric bond • Attractive price point • Aggressive tack, fast-grab formula
- 30 minute working time • Simple installation • Low VOC, extremely low odor • Solvent and isocyanate-free
- Antimicrobial technology



OPEN TIME 0 MIN WORKING TIME 30 MIN CURE TIME 12 HRS EXTREMELY LOW ODOR



COVERAGE: 2" base - up to 560 lf/gal | 4" base - up to 280 lf/gal | 6" base - up to 187 lf/gal
AVAILABLE IN: 10 oz, 30 oz, 1 gal and 4 gal
SHELF LIFE: 2 years



SIGNATURE LINE®

ELEVATE®

ROLLER APPLIED WALL ADHESIVE FOR VINYL PLANK/TILE

- Fast and easy roller application • Aggressive tack, fast grab formula • Holds planks without slipping/sliding
- Non-staining and easy-to-clean • Low VOC, extremely low odor

FLASH TIME
30-60 MINWORKING TIME
2 HRSCURE TIME
12 HRSEXTREMELY
LOW ODOR

COVERAGE: 250-300 ft²/gal
AVAILABLE IN: 1 gal
SHELF LIFE: 2 years



SIGNATURE LINE®

GRAVITY®

ANTI-SKID SUBSTRATE COATING FOR FLOATING FLOOR INSTALLATION

- Prevents lateral movement of flooring • Up to 90% moisture protection • Simple roller application • Fast-drying formula • Releasable with no transfer

RH
85-90%*PH
5-12MVER
5-10 LBS*CURE TIME
1 HRS*EXTREMELY
LOW ODOR

COVERAGE:
Up to 350 ft²/gal (1 coat), 200 ft²/gal (2 coats)
AVAILABLE IN: 4 gal
SHELF LIFE: 2 years

ESSENTIALS LINE

2025

UNIVERSAL LATEX PRIMER COATING

- Primes porous substrates • pH blocker, protects flooring • No stirring/ mixing required • Fast, 1-coat, roller application • Fast-drying formula
- Solvent and isocyanate-free • Zero VOC, extremely low odor
- Attractive price point • Antimicrobial technology

RH 75% PH NTR*5-14 MVER 5 LBS

CURE TIME 30-60 MIN EXTREMELY LOW ODOR



COVERAGE: 300-450 ft²/gal
AVAILABLE IN: 1 and 4 gal
SHELF LIFE: 2 years



SPECIALTY COLLECTION

ACRYLIC LATEX

SPECIALTY COLLECTION

BIO-ENZYMATIC



ADDITIONAL ITEMS

ODORGHOST
MULTI-SURFACE

BIO-ENZYMATIC ORGANIC-BASED
ODOR ELIMINATOR

COVERAGE: Dependant upon user
AVAILABLE IN: 1 gal
SHELF LIFE: 1 years



SPECIALTY COLLECTION

BIO-ENZYMATIC



ADDITIONAL ITEMS

ODORGHOST
MULTI-SURFACE+UV

BIO-ENZYMATIC ORGANIC-BASED
ODOR ELIMINATOR

COVERAGE: Dependant upon user
AVAILABLE IN: 1 gal
SHELF LIFE: 1 years



SPECIALTY COLLECTION

SYNTHETIC LATEX BLEND



ADDITIONAL ITEMS

901

PREMIUM CERAMIC TILE
ADHESIVE - TYPE I

COVERAGE: 25-50 ft²/gal
AVAILABLE IN: 1 and 3.5 gal
SHELF LIFE: 2 years



SPECIALTY COLLECTION

SYNTHETIC RUBBER, RESIN BLEND



ADDITIONAL ITEMS

1N/1N-C

CONTACT CEMENT -
BRUSH GRADE

COVERAGE: Dependant upon user
AVAILABLE IN: 1 pt, 1 qt, 1 gal, and 4 gal
SHELF LIFE: 1 year



SPECIALTY COLLECTION

RESIN BLEND IN SOLVENT BASE



ADDITIONAL ITEMS

725

ALL PURPOSE
SPRAY ADHESIVE








COVERAGE: Dependant upon user
AVAILABLE IN: 12 oz spray
SHELF LIFE: 1 year








Notes:

MOISTURE + SPECIALTY COLLECTIONS

at a glance

							
	SAHARA®	ZEPHYR®	ENHANCE®	FINALE®	ELEVATE®	GRAVITY®	2025
PRODUCT TAGLINE	Unlimited Moisture Vapor Barrier, Elastomeric Membrane	95% Moisture Vapor Barrier, Or Encapsulator, Or Primer Coating	Surface Bond Promoter And Encapsulator	Hard-Set, Elastomeric Cove Base Adhesive	Roller Applied Wall Adhesive For Vinyl Plank/ Tile	Anti-Skid Substrate Coating For Floating Floor Installation	Universal Latex Primer Coating
BASE CHEMISTRY	STPE Polymer-Based (Hybrid Propel®)	Synthetic Latex Blend	STPE Polymer-Based (Hybrid Propel®)	Acrylic Latex Blend	Synthetic Latex Blend	Synthetic Latex Blend	Acrylic Latex
CURING METHOD	Moisture Cure	Evaporation	Moisture Cure	Evaporation	Evaporation	Evaporation	Evaporation
MOISTURE CONTROL	100% RH	93% RH (1 Coat), 95% RH (2 Coats)	No	N/A	No	85% RH (1 Coat), 90% RH (2 Coats)	No
RH	NTR* (100%)	93% (1 Coat), 95% (2 Coats)	90%	N/A	N/A	85% (1 Coat), 90% (2 Coats)	75%
PH	NTR* (5-14)	NTR* (5-14)	NTR* (5-14)	N/A	N/A	5-12	NTR* (5-14)
MVER	NTR*	10 Lbs (1 Coat); 15 Lbs (2 Coats)	8 Lbs	N/A	N/A	5 Lbs (1 Coat); 10 Lbs (2 Coats)	5 lbs
OPEN TIME	N/A	N/A	N/A	0 min	N/A	N/A	N/A
FLASH TIME	N/A	N/A	N/A	N/A	30-60 min	N/A	N/A
WORKING TIME	N/A	N/A	N/A	30 min	2 hrs	N/A	N/A
CURE TIME	8 hrs	1 hr (per coat)	1-2 hrs	12 hrs	12 hrs	1 hr (per coat)	30-60 min
LIGHT TRAFFIC	N/A	N/A	N/A	N/A	N/A	N/A	N/A
HEAVY TRAFFIC	N/A	N/A	N/A	N/A	N/A	N/A	N/A
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A	N/A	N/A
VOCS	< 0.05 g/L	0 g/L	< 0.05 g/L	< 8 g/L	< 8 g/L	< 1 g/L	0 g/L

*NTR = No Testing Required

					
	901	1N/1N-C	725	ODORGHOST™ +UV	ODORGHOST™
PRODUCT TAGLINE	Premium Ceramic Tile Adhesive - Type I	Contact Cement - Brush Grade	All Purpose Spray Adhesive	Bio-Enzymatic Organic-Based Odor Eliminator	Bio-Enzymatic Organic-Based Odor Eliminator
BASE CHEMISTRY	Synthetic Latex Blend	Synthetic Rubber, Resin Blend	Resin Blend in Solvent Base	Bio-Enzymatic	Bio-Enzymatic
CURING METHOD	Evaporation	Evaporation	Evaporation	N/A	N/A
MOISTURE CONTROL	No	No	No	N/A	N/A
RH	N/A	N/A	N/A	N/A	N/A
PH	5-9	5-9	N/A	N/A	N/A
MVER	N/A	N/A	N/A	N/A	N/A
OPEN TIME	0 min	N/A	N/A	N/A	N/A
FLASH TIME	N/A	0-10 min	0-10 min	N/A	N/A
WORKING TIME	30-45 min	30-45 min	30-45 min	N/A	N/A
CURE TIME	12 hrs	24 hrs	24 hrs	N/A	N/A
LIGHT TRAFFIC	48 hrs	N/A	N/A	N/A	N/A
HEAVY TRAFFIC	48 hrs	N/A	N/A	N/A	N/A
ROLLING LOADS	N/A	N/A	N/A	N/A	N/A
SOUND DATA	N/A	N/A	N/A	N/A	N/A
VOCS	< 34 g/L	1N = 648 g/L 1N-C = 0 g/L	0 g/L	0 g/L	0 g/L


MOISTURE + SPECIALTY COLLECTIONS

approved installation tools

	PRODUCT	FLOORING TYPE	TOOL	COVERAGE
MOISTURE	SAHARA®	For use under all glue-down, loose-lay, and floating floors	MOISTURE BARRIER 1/8" x 1/8" x 1/16" V Notch	90-120 ft²/gal
	ZEPHYR®	For use under all glue-down, loose-lay, and floating floors	MOISTURE BARRIER 3/8" Short Nap Paint Roller	350 ft²/gal (1 coat) 200 ft²/gal (2 coats)
SPECIALTY	ENHANCE®	For use under all glue-down, loose-lay, and floating floors	PRIMER ONLY 1/2" Short Nap Paint Roller	Up to 250 ft²/gal
	FINALE®	Approved base types: rubber, vinyl, rubber-vinyl blends, carpet	BOND ONLY 3/32" x 3/32" x 3/32" V Notch	2" base - up to 560 lf/gal 4" base - up to 280 lf/gal 6" base - up to 187 lf/gal
	ELEVATE®	Approved LVP, LVT	BOND ONLY 3/8" Short Nap Paint Roller	250-300 ft²/gal
	GRAVITY®	Approved floating flooring products	MOISTURE BARRIER & ANTI-SKID 3/8" Short Nap Paint Roller	Up to 350 ft²/gal
	2025	For use under all glue-down, loose-lay, and floating floors	PRIMER ONLY 3/8" Short Nap Paint Roller	300-450 ft²/gal
	901	Ceramic wall and floor tile	BOND ONLY 3/16" x 5/16" V Notch	30-50 ft²/gal
		Ceramic wall and floor tile	BOND ONLY 1/4" x 1/4" x 1/4" Sq Notch	25-30 ft²/gal
	1N/1N-C	See Technical Data Sheet for complete information	BOND ONLY Brush applied	Dependant upon user
	725	See Technical Data Sheet for complete information	BOND ONLY Aerosol spray	Dependant upon user
	ODORGHOST™ +UV	Substrate, carpet, carpet-pad (water-safe surfaces)	ODOR CONTROL Spray or roller applied	Dependant upon user
	ODORGHOST™	Substrate, carpet, carpet-pad (water-safe surfaces)	ODOR CONTROL Spray or roller applied	Dependant upon user

ON THE JOB?

THERE'S AN APP FOR THAT!

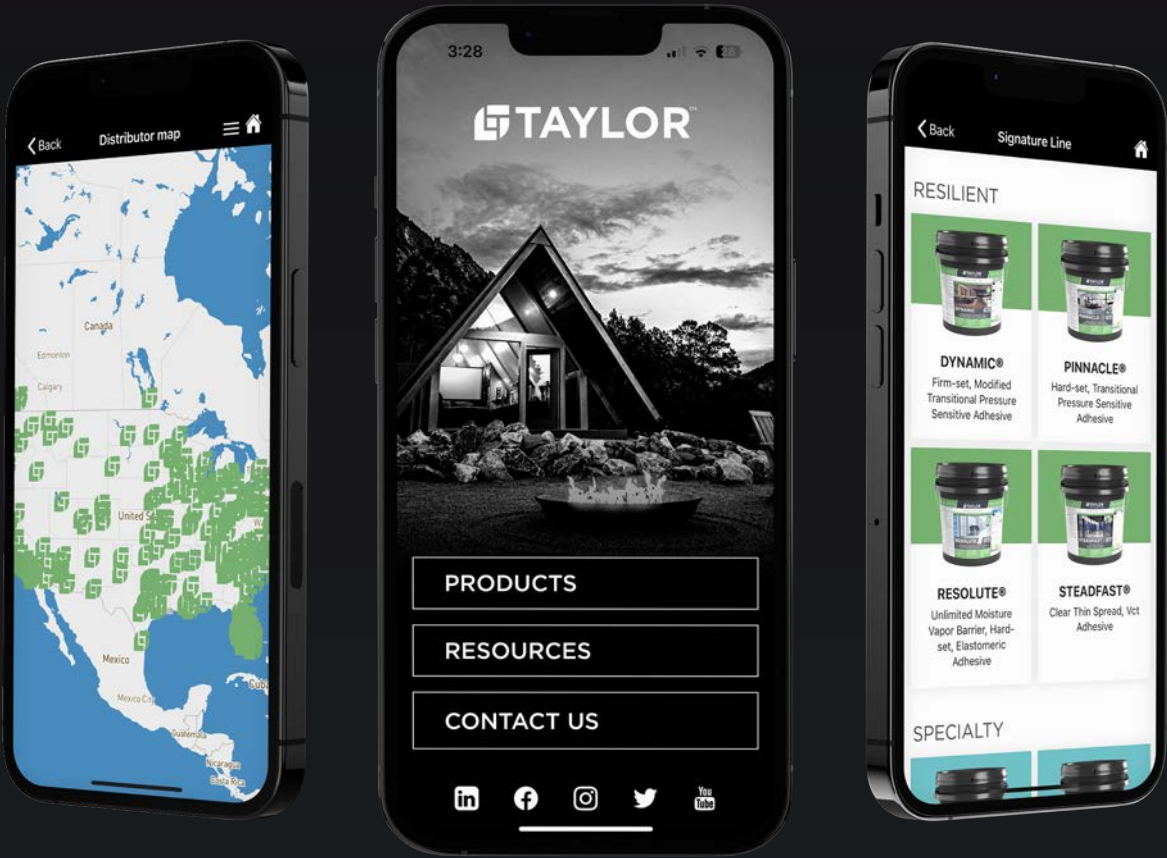

#WithYouEveryStep

We offer the most user-friendly, digital experience in the flooring adhesive industry. Download our app to stay up-to-date on all things TAYLOR.



For more details, visit
tayloradhesives.com



Scan for up-to-date
product information.



THE TAYLOR *technical department*

Technical Department Hours: Monday - Friday 8am to 8pm EST | 706-712-5823

We are dedicated to the training and success of installers, sales representatives, and the entire flooring industry. Our experienced technicians possess the knowledge and expertise that help uphold our brand promise of being With You Every Step™.

What's inside our TAYLOR Technical & Training Center (T³C)?

Located in Dalton, GA, our T³C serves as a central support hub and an extension of our customers technical departments. Inside our T³C facility you will find the following:

- *Training classroom*
- *Product testing rooms*
- *Hands-on application areas*
- *Custom rolling-load testing lab*
- *Moisture modules*
- *Environmental chamber*
- *TAYLOR TIME studio*
- *Conference room*
- *Shipping/Receiving center*
- *Technical team offices*

How our Technical Team can help

No matter where you are, our Technical Team is here to help. We can host you at our facility, come to your job-site or locations, or assist you through digital options.

- *T³C (Taylor Technical & Training Center)*
- *Flooring manufacturing plants*
- *Flooring manufacturer testing facilities*
- *Distributor locations*
- *On-site locations*
- *Email/text*
- *On-call 706-712-5823*
- *Video chats*
- *Live webinars*
- *Installation videos*
- *How-to videos*
- *Bilingual support*



Scan QR code to find out more.

Technical Team Services

Our product testing, troubleshooting and training often make the difference between success and failure. English and Spanish technical support are available throughout North America.

TRAINING:

- *Product knowledge*
- *Installation skills*
- *Best practices*
- *General knowledge*
- *Installation techniques*
- *Product selection*
- *Substrate preparation*
- *Adhesive application*
- *Terminology*
- *Acclimation*
- *Custom sessions*
- *How-to-videos*

TROUBLESHOOTING:

- *Moisture issues*
- *Substrate history*
- *Substrate conditions*
- *Substrate preparation*
- *Adhesives/coatings*
- *Flooring materials*
- *Warranty coverage*
- *Job-site inspections*
- *Compatibility*
- *Peaking, gapping, cupping*

TESTING OUR PRODUCTS:

- *RH - Moisture tolerance*
- *MVER - Moisture vapor transmission*
- *pH - Alkali tolerance*
- *Viscosity/spread-ability*
- *Temperature tolerance*
- *Traffic times*
- *Peel/shear strength*
- *Bond strength*
- *Compatibility/performance*
- *Rolling-load testing*

TESTING YOUR PRODUCTS:

- *Strength*
- *Dimensional stability*
- *Plasticizer migration*
- *Moisture tolerance*
- *Environmental performance*
(heat, cold, humidity)

PERFORMANCE YOU CAN TRUST



TAYLOR industry-leading warranties can protect you against bond failures, de-lamination due to elevated moisture, or even topical liquids.

WHAT OUR PERFORMANCE WARRANTIES COVER

- ✓ Replacement floor covering material
- ✓ Replacement TAYLOR product(s)
- ✓ Reasonable labor costs to repair/replace

COVERAGE THAT LASTS



When you buy a TAYLOR product through any of our distribution partners, we stand behind its performance with a 10-Year Warranty.



When a TAYLOR product is installed by an approved certified installer, we stand behind its performance with a Lifetime Warranty*.




SCAN TO
LEARN MORE

*Lifetime Warranty matches the warranty term of the floor covering material installed. For a list of approved certified installers, visit our website tayloradhesives.com/warranties. Approved certified installers must be in good standing and have current certifications at CFI or NWFA (subject to change, check our website for the most up to date information).

NOTE: Performance warranties cover Signature Line® and Essentials Line products only (excluding TAYLOR 900). Coverage varies based on product, see each product's warranty document for complete details.

From our doorstep to yours... faster!

Adhesives may not be your primary business, but your primary business can't function without them.

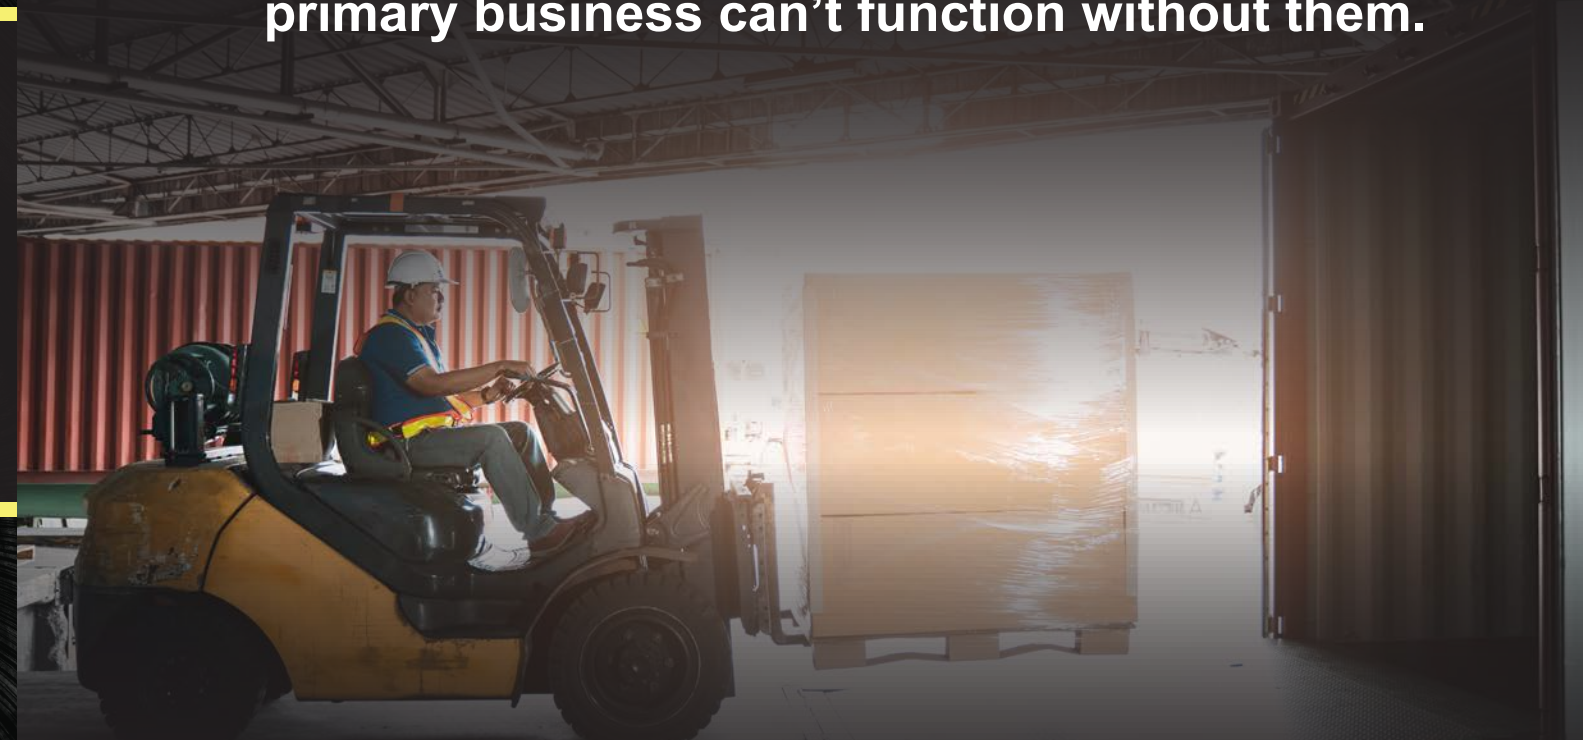

26

Total
locations

18

Site R&D and QC
support labs

15

Manufacturing
facilities

7

R&D and application
development centers

4

Overseas repackaging
facilities

LEARN MORE



Our goal is to serve you well. By offering reliable adhesives, hands-on expertise, and unmatched lead times, we help keep your operation running smoothly. Boasting multi-site manufacturing capabilities and extensive warehouse capacity, we provide you with access to quicker deliveries and greater inventories. Experience our personalized service today.

Get started at meridianadhesives.com

Meridian
Adhesives Group
The Science of Solutions™

sustainability

INDUSTRY FIRSTS

CERTIFICATIONS

- 1991 Green Label (Plus®)
- 2007 GREENGUARD
- 2008 USDA BioPreferred®
- 2013 FloorScore®
- 2014 Cradle to Cradle®

ACHIEVEMENTS

- 1989 Developed the first solvent-free flooring adhesive in the U.S.
- 1995 Chosen by the EPA as the Exclusive Adhesive for their headquarters
- 2006 Introduced our first solvent and isocyanate-free wood adhesive
- 2019 Added our products to the mindful MATERIALS Library

Certification Key

 CRI GreenLabel Plus

 FloorScore

 Greenguard


































 Material Health - Bronze

 Material Health - Silver

 Red List Free

Most of our products can be found in the mindful Materials transparency library.

RESILIENT COLLECTION

	RESOLUTE®	PINNACLE®	DYNAMIC®	STEADFAST®	2062	2037	501
							
							
							
							
							
							

























CARPET COLLECTION

	AGILE®	VERSATILE®	900	722	2055	2070	2089
							
							
							
							
							
							

WOOD COLLECTION

	RIDGELINE®	IRONWOOD®	ASPEN®	IRONWOOD® GLUE ASSIST	2049
					
					
					
					
					
					

MOISTURE + SPECIALTY COLLECTIONS

	SAHARA®	ZEPHYR®	ENHANCE®	FINALE®	ELEVATE®	GRAVITY®	2025
							
							
							
							
							
							



Meridian

Adhesives Group

Our divisions collaborate across internal organizational boundaries to supply multiple markets with innovative adhesive and bonding technologies, backed by industry-leading research and development.

Meridian Adhesives Group. The science of solutions.



The entire Meridian portfolio is specialized in adhesive technology



Enhanced product innovation and technical resources



Access to global perspective and market Intel



Leverage raw material buying power (supply resilience)



Manufacturing, warehousing and logistics support



Access to capital expenditures and expansion projects

We actively support many well-respected industry associations and groups. Our goal is to help further growth and service throughout our industry. Thank you for supporting us in return.

LEARN MORE



PACKAGING & SHIPPING

	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	WEIGHT/PALLET	SHELF LIFE
RESILIENT	RESOLUTE®	2 gal	Plastic Pail	719692-022671	1	19 lbs	60	1,190 lbs	1 year
		4 gal	Plastic Pail	719692-024057	1	37 lbs	48	1,826 lbs	
	PINNACLE®	1 gal	Plastic Pail	719692-022657	4	35 lbs	45	1,625 lbs	2 years
		4 gal	Plastic Pail	719692-022640	1	35 lbs	48	1,730 lbs	
	DYNAMIC®	1 gal	Plastic Pail	719692-022626	4	37 lbs	45	1,715 lbs	2 years
		4 gal	Plastic Pail	719692-022619	1	37 lbs	48	1,826 lbs	
	STEADFAST®	1 gal	Plastic Pail	719692-023029	4	36 lbs	45	1,670 lbs	2 years
		4 gal	Plastic Pail	719692-023012	1	36 lbs	48	1,778 lbs	
	2062	8 oz	Squeeze Bottle	719692-021063	12	8 lbs	60	530 lbs	2 years
	2037	1 gal	Plastic Pail	719692-021117	4	38 lbs	45	1,760 lbs	2 years
		4 gal	Plastic Pail	719692-021049	1	38 lbs	48	1,874 lbs	
	501	1 gal	Plastic Pail	719692-002260	2	13 lbs	75	1,025 lbs	1 year
WOOD	RIDGELINE®	4 gal	Plastic Pail	719692-022572	1	44 lbs	48	2,162 lbs	1 year
	IRONWOOD®	4 gal	Plastic Pail	719692-022633	1	43 lbs	48	2,114 lbs	1 year
	ASPEN®	4 gal	Plastic Pail	719692-023388	1	43 lbs	48	2,114 lbs	1 year
	IRONWOOD® GLUE ASSIST	28 oz	Plastic Cartridge	719692-023623	12	28 lbs	40	1,170 lbs	1 year
		20 oz	Sausage Tube	719692-023999	12	20	60	1,250 lbs	
	ALPINE™	4 gal	Metal Pail	719692-024101	1	57 lbs	48	2,786 lbs	1 year
	TIMBERLINE™	4 gal	Metal Pail	719692-023913	1	57 lbs	48	2,786 lbs	1 year
	2049	16 oz	Squeeze Bottle	719692-022183	12	28 lbs	96	2,738 lbs	2 year
	REPAIR™	1 qt	Plastic Bottle	719692-024118	6	14 lbs	60	890 lbs	1 year
	REPAIR™ KIT	Box	Cardboard Box	719692-024125	8	14 lbs	48	722 lbs	1 year
	AGILE®	4 gal	Plastic Pail	719692-023074	1	43 lbs	48	2,114 lbs	2 years
	VERSATILE®	1 gal	Plastic Pail	719692-022763	4	37 lbs	45	1,715 lbs	2 years
		4 gal	Plastic Pail	719692-022701	1	37 lbs	48	1,826 lbs	
CARPET	900	4 gal	Plastic Pail	719692-001492	1	42 lbs	48	2,066 lbs	2 years
	722	1 gal	Plastic F-Style	719692-001362	4	45 lbs	48	2,210 lbs	2 years
	710	1 qt	Squeeze Bottle	719692-001331	12	26 lbs	48	1,298 lbs	1 year
		1 gal	Plastic F-Style	719692-001348	4	34 lbs	48	1,682 lbs	
	EDGE-LOCK	8 oz	Squeeze Bottle	719692-023982	12	8 lbs	60	530 lbs	1 year
	2070	4 gal	Plastic Pail	719692-001737	1	42 lbs	48	2,066 lbs	2 years
	2055	4 gal	Plastic Pail	719692-001676	1	44 lbs	48	2,162 lbs	2 years
	2089	4 gal	Plastic Pail	719692-016304	1	44 lbs	48	2,162 lbs	2 years
	720	1 gal	Metal F-Style	719692-001355	4	33 lbs	60	2,030 lbs	1 year
	720-C	1 gal	Metal F-Style	719692-016427	4	33 lbs	60	2,030 lbs	1 year
	757	4 gal	Metal Pail	719692-001430	1	40 lbs	48	1,970 lbs	1 year
	775	1 qt	Metal Container	719692-001461	12	25 lbs	60	1,550 lbs	1 year
	775-C	1 qt	Metal Container	719692-015598	12	25 lbs	60	1,550 lbs	1 year

STORAGE REQUIREMENTS

All TAYLOR products should be stored in their original container, unopened, at temperatures between 50-90°F (10-32° C). While most products are freeze-thaw stable (10°F [-12°C]), it is recommended to protect them from freezing. Some products are not freeze-thaw stable and must be protected from freezing. See each product’s technical data sheet (TDS) for complete details.

*Product weights may vary.



Scan for up-to-date product information.



Download on the App Store



GET IT ON Google Play

	PRODUCT	SIZE	PACKAGING	UPC (SKU)	#/UNIT	UNIT WEIGHT*	UNITS/PALLET	WEIGHT/PALLET	SHELF LIFE
SPECIALTY	ENHANCE®	2 gal	Plastic Cartridge	719692-023258	1	27 lbs	60	1,670 lbs	1 year
	FINALE®	10 oz	Plastic Cartridge	719692-023067	12	12 lbs	60	770 lbs	2 years
		30 oz	Plastic Cartridge	719692-023050	12	35 lbs	50	1,800 lbs	
		1 gal	Plastic Pail	719692-023043	4	48 lbs	45	2,210 lbs	
		4 gal	Plastic Pail	719692-023036	1	48 lbs	48	2,354 lbs	
	ELEVATE®	1 gal	Plastic Pail	719692-023968	4	37 lbs	45	1,715 lbs	2 years
	GRAVITY®	4 gal	Plastic Pail	719692-023982	1	36 lbs	48	1,778 lbs	2 years
	2025	1 gal	Plastic F-Style	719692-021025	4	37 lbs	48	1,826 lbs	2 years
		4 gal	Plastic Pail	719692-015772	1	37 lbs	48	1,826 lbs	
	901	1 gal	Plastic Pail	719692-014027	4	54 lbs	45	2,480 lbs	2 years
		3.5 gal	Plastic Pail	719692-010357	1	48 lbs	48	2,354 lbs	
	1N	1 qt	Metal Container	719692-002086	12	23 lbs	48	1,154 lbs	1 year
		1 gal	Metal Container	719692-002093	4	29 lbs	45	1,355 lbs	
		4 gal	Metal Pail	719692-002109	1	32 lbs	48	1,586 lbs	
MOISTURE	1N-C	1 pt	Metal Container	719692-015543	12	13 lbs	60	830 lbs	1 year
		1 gal	Metal Container	719692-015567	4	29 lbs	45	1,355 lbs	
	725	12 oz	Aerosol Spray	719692-016779	12	16 lbs	48	818 lbs	1 year
	ODORGHOST™ + UV	1 gal	Plastic F-Style	719692-023869	4	36 lbs	48	1,778 lbs	1 year
	ODORGHOST™	1 gal	Plastic F-Style	719692-023852	4	36 lbs	48	1,778 lbs	1 year
	SAHARA®	2 gal	Plastic Pail	719692-022749	1	17 lbs	60	1,070 lbs	1 year
	ZEPHYR®	4 gal	Plastic Pail	719692-022732	1	37 lbs	48	1,826 lbs	2 years

PRODUCTION CODE
KEY 1

SAMPLE BATCH CODE: **D2C2325** = Dalton, 2022, March, Designation #

D**2****C****2325** = The first character designates where the product was manufactured
Example: **D** = Dalton **F** = Fontana **T** = Texas

D**2****C****2325** = The second character designates the year of manufacture
Example: **9** = 2019 **0** = 2020 **1** = 2021 **2** = 2022

D2C**2325** = The third character designates the month of manufacture
Example: **A** = Jan **B** = Feb **C** = March **D** = April

D2C**2325** = The last four numbers are generated sequentially

PRODUCTION CODE
KEY 2

SAMPLE BATCH CODE: **12G23** = The 12th batch of July 2023

12**G****23** = The first two character designate the batch number for the month

12**G****23** = The third character designates the month of manufacture
Example: **A** = Jan **B** = Feb **C** = March **D** = April

12G**23** = The last two characters designate the year of manufacture



Since 2018, TAYLOR Adhesives has been part of the Meridian Adhesives Group. Meridian Adhesives is a specialized adhesive portfolio serving multiple industries. To learn more about TAYLOR, visit us online by scanning below.



SCAN AND
LEARN MORE

☎ 800.868.4583
💻 tayloradhesives.com
📍 800 College Drive, Dalton, GA 30720



© 2024 Taylor Adhesives. All rights reserved.